



Chapter 15: Network Structures

- Background
- Topology
- Network Types
- Communication
- Communication Protocol
- Robustness
- Design Strategies


Operating System Concepts 15.1 Silberschatz, Galvin and Gagne ©2002

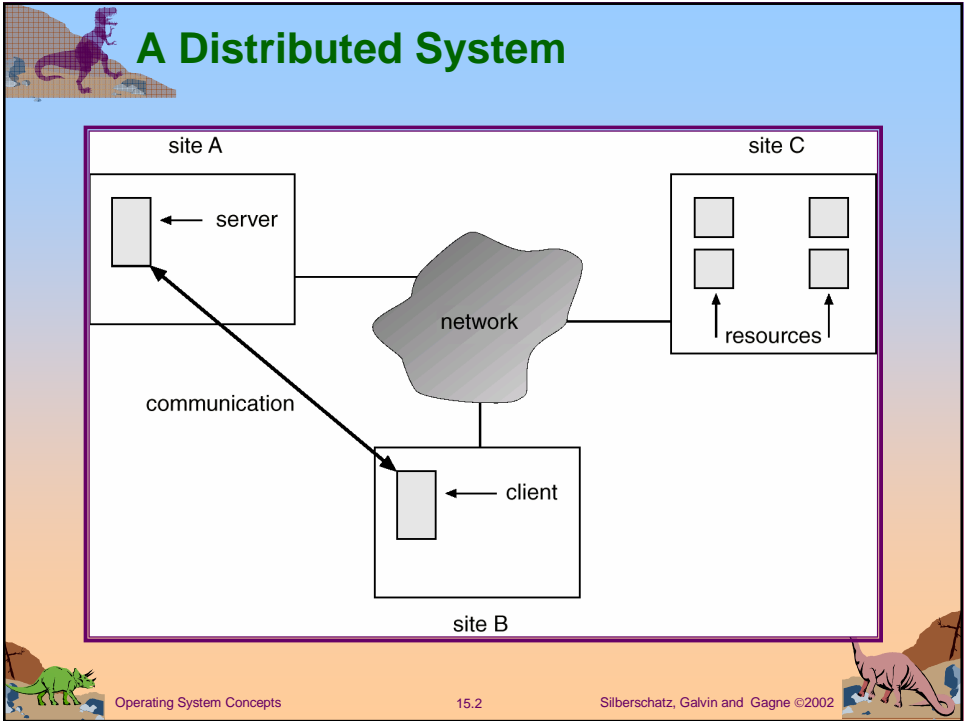



Motivation



- Resource sharing
 - ☞ sharing and printing files at remote sites
 - ☞ processing information in a distributed database
 - ☞ using remote specialized hardware devices
- Computation speedup – *load sharing*
- Reliability – detect and recover from site failure, function transfer, reintegrate failed site
- Communication – message passing



Operating System Concepts


15.3

Silberschatz, Galvin and Gagne ©2002



Network-Operating Systems


- Users are aware of multiplicity of machines. Access to resources of various machines is done explicitly by:
 - ☞ Remote logging into the appropriate remote machine.
 - ☞ Transferring data from remote machines to local machines, via the File Transfer Protocol (FTP) mechanism.




Operating System Concepts

15.4


Silberschatz, Galvin and Gagne ©2002





Distributed-Operating Systems



- Users not aware of multiplicity of machines. Access to remote resources similar to access to local resources.
- Data Migration – transfer data by transferring entire file, or transferring only those portions of the file necessary for the immediate task.
- Computation Migration – transfer the computation, rather than the data, across the system.



Operating System Concepts


15.5

Silberschatz, Galvin and Gagne ©2002



Distributed-Operating Systems (Cont.)


- Process Migration – execute an entire process, or parts of it, at different sites.
 - Load balancing – distribute processes across network to even the workload.
 - Computation speedup – subprocesses can run concurrently on different sites.
 - Hardware preference – process execution may require specialized processor.
 - Software preference – required software may be available at only a particular site.
 - Data access – run process remotely, rather than transfer all data locally.



Operating System Concepts

15.6

Silberschatz, Galvin and Gagne ©2002




Topology


- Sites in the system can be physically connected in a variety of ways; they are compared with respect to the following criteria:
 - **Basic cost.** How expensive is it to link the various sites in the system?
 - **Communication cost.** How long does it take to send a message from site *A* to site *B*?
 - **Reliability.** If a link or a site in the system fails, can the remaining sites still communicate with each other?
- The various topologies are depicted as graphs whose nodes correspond to sites. An edge from node *A* to node *B* corresponds to a direct connection between the two sites.
- The following six items depict various network topologies.

Operating System Concepts
15.7
Silberschatz, Galvin and Gagne ©2002


Network Topology




fully connected network




partially connected network



tree structured network



star network



ring network

Operating System Concepts
15.8
Silberschatz, Galvin and Gagne ©2002

Network Types

- Local-Area Network (LAN) – designed to cover small geographical area.
 - Multiaccess bus, ring, or star network.
 - Speed \approx 10 megabits/second, or higher.
 - Broadcast is fast and cheap.
 - Nodes:
 - usually workstations and/or personal computers
 - a few (usually one or two) mainframes.

Operating System Concepts 15.9 Silberschatz, Galvin and Gagne ©2002

Network Types (Cont.)

- Depiction of typical LAN:


The diagram illustrates a typical LAN configuration. It features two horizontal bus networks. The top bus is connected to three nodes: a 'micro processor' (represented by a computer monitor icon), a 'printer' (represented by a printer icon), and a 'mini' processor (represented by a server rack icon). The bottom bus is connected to three nodes: a 'file system' (represented by a server rack icon), a 'mini' processor (represented by a server rack icon), and a 'micro' processor (represented by a computer monitor icon). A central 'gateway' (represented by a circle with a vertical double-headed arrow) connects the two buses. The labels 'processors' are placed on the left side of each bus line.


Operating System Concepts 15.10 Silberschatz, Galvin and Gagne ©2002

Network Types (Cont.)

- Wide-Area Network (WAN) – links geographically separated sites.
 - Point-to-point connections over long-haul lines (often leased from a phone company).
 - Speed \approx 100 kilobits/second.
 - Broadcast usually requires multiple messages.
 - Nodes:
 - usually a high percentage of mainframes

Communication Processors in a Wide-Area Network

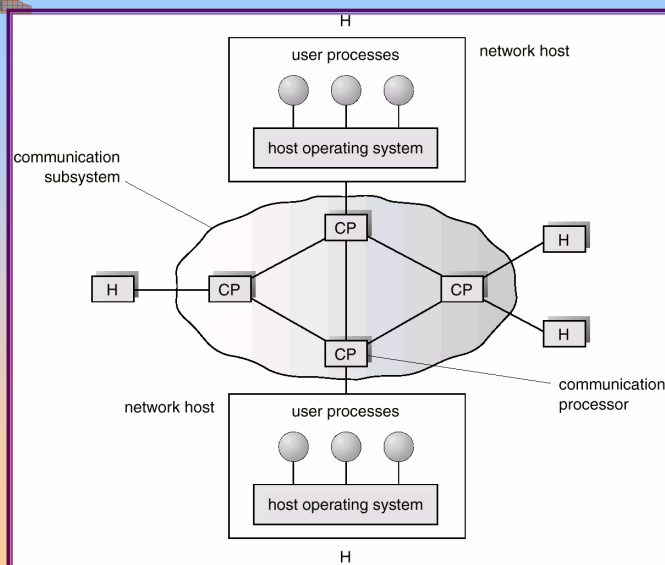




Communication

The design of a *communication* network must address four basic issues:



- **Naming and name resolution:** How do two processes locate each other to communicate?
- **Routing strategies.** How are messages sent through the network?
- **Connection strategies.** How do two processes send a sequence of messages?
- **Contention.** The network is a shared resource, so how do we resolve conflicting demands for its use?



Operating System Concepts

15.13


Silberschatz, Galvin and Gagne ©2002



Naming and Name Resolution

- Name systems in the network
- Address messages with the process-id.
- Identify processes on remote systems by


<host-name, identifier> pair.
- *Domain name service* (DNS) – specifies the naming structure of the hosts, as well as name to address resolution (Internet).




Operating System Concepts

15.14


Silberschatz, Galvin and Gagne ©2002







Routing Strategies

- **Fixed routing.** A path from *A* to *B* is specified in advance; path changes only if a hardware failure disables it.
 - Since the shortest path is usually chosen, communication costs are minimized.
 - Fixed routing cannot adapt to load changes.
 - Ensures that messages will be delivered in the order in which they were sent.
- **Virtual circuit.** A path from *A* to *B* is fixed for the duration of one session. Different sessions involving messages from *A* to *B* may have different paths.
 - Partial remedy to adapting to load changes.
 - Ensures that messages will be delivered in the order in which they were sent.





Operating System Concepts 15.15 Silberschatz, Galvin and Gagne ©2002 




Routing Strategies (Cont.)

- **Dynamic routing.** The path used to send a message from site *A* to site *B* is chosen only when a message is sent.
 - Usually a site sends a message to another site on the link least used at that particular time.
 - Adapts to load changes by avoiding routing messages on heavily used path.
 - Messages may arrive out of order. This problem can be remedied by appending a sequence number to each message.





Operating System Concepts 15.16 Silberschatz, Galvin and Gagne ©2002 




Connection Strategies

- **Circuit switching.** A permanent physical link is established for the duration of the communication (i.e., telephone system).
- **Message switching.** A temporary link is established for the duration of one message transfer (i.e., post-office mailing system).
- **Packet switching.** Messages of variable length are divided into fixed-length packets which are sent to the destination. Each packet may take a different path through the network. The packets must be reassembled into messages as they arrive.
- Circuit switching requires setup time, but incurs less overhead for shipping each message, and may waste network bandwidth. Message and packet switching require less setup time, but incur more overhead per message.





Operating System Concepts 15.17 Silberschatz, Galvin and Gagne ©2002




Contention

Several sites may want to transmit information over a link simultaneously. Techniques to avoid repeated collisions include:

- **CSMA/CD.** Carrier sense with multiple access (CSMA); collision detection (CD)
 - ☞ A site determines whether another message is currently being transmitted over that link. If two or more sites begin transmitting at exactly the same time, then they will register a CD and will stop transmitting.
 - ☞ When the system is very busy, many collisions may occur, and thus performance may be degraded.
- **SCMA/CD** is used successfully in the Ethernet system, the most common network system.



Operating System Concepts 15.18 Silberschatz, Galvin and Gagne ©2002



Contention (Cont.)

- **Token passing.** A unique message type, known as a token, continuously circulates in the system (usually a ring structure). A site that wants to transmit information must wait until the token arrives. When the site completes its round of message passing, it retransmits the token. A token-passing scheme is used by the IBM and Apollo systems.
- **Message slots.** A number of fixed-length message slots continuously circulate in the system (usually a ring structure). Since a slot can contain only fixed-sized messages, a single logical message may have to be broken down into a number of smaller packets, each of which is sent in a separate slot. This scheme has been adopted in the experimental Cambridge Digital Communication Ring

