

EECS 10: Computational Methods in Electrical and Computer Engineering

Lecture 20

Rainer Dömer

doemer@uci.edu

The Henry Samueli School of Engineering
Electrical Engineering and Computer Science
University of California, Irvine

Lecture 20: Overview

- Midterm 2 Review Quiz
 - Top 5 most “difficult” questions
- Basic Computer Architecture
 - Computer components
- Binary Data Representation
 - Bits, bytes, and words
 - Memory sizes
 - Memory format
 - Number systems
 - Memory segmentation

Midterm 2 Review Quiz

- Top 5 most “difficult” questions:
 - Rank 5: Question 6 (71.7% wrong answers)
- In the program below, what is the result of calling `grade(75)`?

- a) 'A'
- b) 'B'
- c) 'C'
- d) 'D'
- e) 'F'

```

1 char grade(int x)
2 { char g;
3   if (x > 90)
4     { g = 'A'; }
5   if (x > 80)
6     { g = 'B'; }
7   if (x > 70)
8     { g = 'C'; }
9   if (x > 60)
10    { g = 'D'; }
11  else
12    { g = 'F'; }
13  return g;
14 }
```

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

3

Midterm 2 Review Quiz

- Top 5 most “difficult” questions:
 - Rank 5: Question 6 (71.7% wrong answers)
- In the program below, what is the result of calling `grade(75)`?

- a) 'A'
- b) 'B'
- c) 'C'
-  d) 'D'
- e) 'F'

```

1 char grade(int x)
2 { char g;
3   if (x > 90)
4     { g = 'A'; }
5   if (x > 80)
6     { g = 'B'; }
7   if (x > 70)
8     { g = 'C'; }
9   if (x > 60)
10    { g = 'D'; }
11  else
12    { g = 'F'; }
13  return g;
14 }
```

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

4

Midterm 2 Review Quiz

- Top 5 most “difficult” questions:
 - Follow-up Question 8 (13.1% wrong answers!)
- Let’s revise the program. If you replace each `if` in lines 5, 7 and 9 with `else if` (and adjust the indentation), what is the result then when calling `grade(75)`?

- a) 'A'
- b) 'B'
- c) 'C'
- d) 'D'
- e) 'F'

```

1 char grade(int x)
2 { char g;
3   if (x > 90)
4     { g = 'A'; }
5   if (x > 80)
6     { g = 'B'; }
7   if (x > 70)
8     { g = 'C'; }
9   if (x > 60)
10    { g = 'D'; }
11  else
12    { g = 'F'; }
13  return g;
14 }
```

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

5

Midterm 2 Review Quiz

- Top 5 most “difficult” questions:
 - Follow-up Question 8 (13.1% wrong answers!)
- Let’s revise the program. If you replace each `if` in lines 5, 7 and 9 with `else if` (and adjust the indentation), what is the result then when calling `grade(75)`?

- a) 'A'
- b) 'B'
-  c) 'C'
- d) 'D'
- e) 'F'

```

1 char grade(int x)
2 { char g;
3   if (x > 90)
4     { g = 'A'; }
5   if (x > 80)
6     { g = 'B'; }
7   if (x > 70)
8     { g = 'C'; }
9   if (x > 60)
10    { g = 'D'; }
11  else
12    { g = 'F'; }
13  return g;
14 }
```

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

6

Midterm 2 Review Quiz

- Top 5 most “difficult” questions:
 - Rank 4: Question 14 (72.8% wrong answers)
- Given two global variables `int x=7` and `int y=8`, which of the following functions properly swaps the values such that `x=8` and `y=7`?

(Check all that apply! 2 pts.)

- a)

```
void swap(void)
{ int t;
  t = x; x = y; y = t; }
```
- b)

```
void swap(int x, int y)
{ int t;
  t = x; x = y; y = t; }
```
- c)

```
void swap(int x, int y)
{ x = y; y = x; }
```
- d)

```
void swap(void)
{ x = y; y = x; }
```
- e)

```
void swap(void)
{ int t;
  t = y; y = x; x = t; }
```

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

7

Midterm 2 Review Quiz

- Top 5 most “difficult” questions:
 - Rank 4: Question 14 (72.8% wrong answers)
- Given two global variables `int x=7` and `int y=8`, which of the following functions properly swaps the values such that `x=8` and `y=7`?

(Check all that apply! 2 pts.)

-  a)

```
void swap(void)
{ int t;
  t = x; x = y; y = t; }
```
- b)

```
void swap(int x, int y)
{ int t;
  t = x; x = y; y = t; }
```
- c)

```
void swap(int x, int y)
{ x = y; y = x; }
```
- d)

```
void swap(void)
{ x = y; y = x; }
```
-  e)

```
void swap(void)
{ int t;
  t = y; y = x; x = t; }
```

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

8

Midterm 2 Review Quiz

- Top 5 most “difficult” questions:
 - Rank 3: Question 9 (75.9% wrong answers)
- Which of the following C program fragments is equivalent to the following loop? (Check all that apply! 2 pts.)

```
for(Box1; Box2; Box3)
{ Box4; }
```

- | | |
|--|---|
| <p>a) <pre>Box1; while(Box2) { Box4; Box3; }</pre></p> <p>b) <pre>Box1; while(Box2) { Box3; Box4; }</pre></p> <p>c) <pre>Box2; while(Box1) { Box4; Box3; }</pre></p> | <p>d) <pre>while(Box1) { Box2; Box3; Box4; }</pre></p> <p>e) <pre>while(Box2) { Box1; Box4; Box3; }</pre></p> |
|--|---|

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

9

Midterm 2 Review Quiz

- Top 5 most “difficult” questions:
 - Rank 3: Question 9 (75.9% wrong answers)
- Which of the following C program fragments is equivalent to the following loop? (Check all that apply! 2 pts.)

```
for(Box1; Box2; Box3)
{ Box4; }
```

- | | |
|--|---|
| <p> a) <pre>Box1; while(Box2) { Box4; Box3; }</pre></p> <p>b) <pre>Box1; while(Box2) { Box3; Box4; }</pre></p> <p>c) <pre>Box2; while(Box1) { Box4; Box3; }</pre></p> | <p>d) <pre>while(Box1) { Box2; Box3; Box4; }</pre></p> <p>e) <pre>while(Box2) { Box1; Box4; Box3; }</pre></p> |
|--|---|

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

10

Midterm 2 Review Quiz

- Top 5 most “difficult” questions:
 - Rank 2: Question 16 (76.4% wrong answers)
- Which of the following are valid declarations of an integer array **A** of size 3?
(Check all that apply! 2 pts.)

- a) `int A[3] = {1,2,3};`
- b) `int A[3] = {1,2};`
- c) `int A[3];`
- d) `int A[] = {1,2,3};`
- e) `int A[3] = {};`

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

11

Midterm 2 Review Quiz

- Top 5 most “difficult” questions:
 - Rank 2: Question 16 (76.4% wrong answers)
- Which of the following are valid declarations of an integer array **A** of size 3?
(Check all that apply! 2 pts.)

- a) `int A[3] = {1,2,3};`
- b) `int A[3] = {1,2};`
- c) `int A[3];`
- d) `int A[] = {1,2,3};`
- e) `int A[3] = {};`

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

12

Midterm 2 Review Quiz

- Top 5 most “difficult” questions:
 - Rank 1: Question 4 (81.2% wrong answers)
- In the `gdb` debugger, which commands allow you to run your program step by step? (Check all that apply! 2 pts.)
 - a) `step`
 - b) `cont`
 - c) `next`
 - d) `run`
 - e) `back`

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

13

Midterm 2 Review Quiz

- Top 5 most “difficult” questions:
 - Rank 1: Question 4 (81.2% wrong answers)
- In the `gdb` debugger, which commands allow you to run your program step by step? (Check all that apply! 2 pts.)
 - a) `step`
 - b) `cont`
 - c) `next`
 - d) `run`
 - e) `back`


EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

14

Basic Computer Architecture

- Essential Computer Components
 - Central Processing Unit (CPU)
 - e.g. Intel Pentium, Motorola PowerPC, Sun SPARC, ...
 - Random Access Memory (RAM)
 - storage for program and data, read and write access
 - Read Only Memory (ROM)
 - fixed storage for basic input/output system (BIOS)
 - I/O Units
 - Input/output units connecting to peripherals

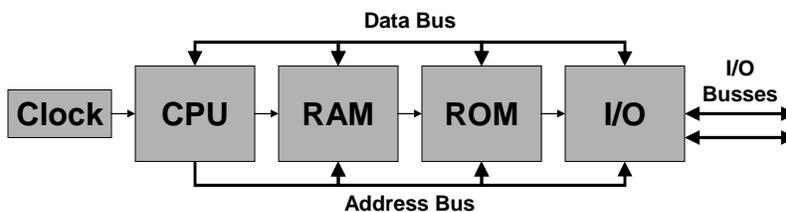


EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

15

Binary Data Representation

- Programs and data in a computer are represented in binary format
 - 1 *bit* (binary digit), 2 possible values
 - 0 (false, “no”, power off, “empty”, ...)
 - 1 (true, “yes”, power on, “solid”, ...)
 - 1 *byte* = 8 bits ($2^8 = 256$ values)
 - in C, type `char` equals one byte*
 - 1 *word* = 4 bytes* ($2^{32} = 4294967296$ values)
 - in C, type `int` equals one word
- Memory size is measured in Bytes
 - 1 KB = 1024 byte = 1 “kilo byte”
 - 1 MB = 1024*1024 byte = 1 “mega byte”
 - 1 GB = 1024*1024*1024 byte = 1 “giga byte”



(*architecture dependent!)

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer


16

Binary Data Representation

- Memory is composed of addressable bytes

- Example:
1 KB of memory
- What is the value at address 7?

$$\begin{array}{r}
 7 \quad \square \blacksquare \square \square \blacksquare \blacksquare \square \blacksquare \\
 \quad \quad 7 \quad 6 \quad 5 \quad 4 \quad 3 \quad 2 \quad 1 \quad 0 \\
 = 0 \cdot 2^7 + 1 \cdot 2^6 + 0 \cdot 2^5 + 0 \cdot 2^4 \\
 + 1 \cdot 2^3 + 1 \cdot 2^2 + 0 \cdot 2^1 + 1 \cdot 2^0 \\
 = 0 \cdot 128 + 1 \cdot 64 + 0 \cdot 32 + 0 \cdot 16 \\
 + 1 \cdot 8 + 1 \cdot 4 + 0 \cdot 2 + 1 \cdot 1 \\
 = 64 + 8 + 4 + 1 \\
 = 77
 \end{array}$$

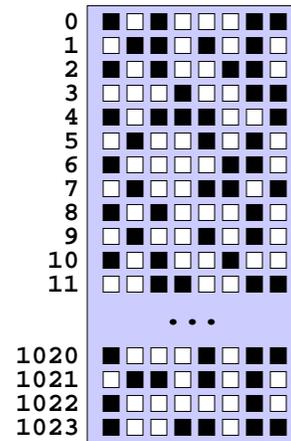

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

17

Binary Data Representation

- Number Systems
 - DEC: Decimal numbers
 - Base 10, digits 0, 1, 2, 3, ..., 9
 - e.g. $157 = 1 \cdot 10^2 + 5 \cdot 10^1 + 7 \cdot 10^0$
 - BIN: Binary numbers
 - Base 2, digits 0, 1
 - e.g. $10011101_2 = 1 \cdot 2^7 + 0 \cdot 2^6 + \dots + 1 \cdot 2^0$
 - OCT: Octal numbers
 - Base 8, digits 0, 1, 2, 3, ..., 7
 - e.g. $235_8 = 2 \cdot 8^2 + 3 \cdot 8^1 + 5 \cdot 8^0$
 - HEX: Hexadecimal numbers
 - Base 16, digits 0, 1, 2, 3, ..., 9, A, B, C, ..., F
 - e.g. $9D_{16} = 9 \cdot 16^1 + 13 \cdot 16^0$

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

18

Binary Data Representation

- Number Systems

DEC	BIN	OCT	HEX
0	0000	0	0
1	0001	1	1
2	0010	2	2
3	0011	3	3
4	0100	4	4
5	0101	5	5
6	0110	6	6
7	0111	7	7
8	1000	10	8
9	1001	11	9
10	1010	12	A
11	1011	13	B
12	1100	14	C
13	1101	15	D
14	1110	16	E
15	1111	17	F

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

19

Binary Data Representation

- Number Systems (signed vs. unsigned)

SDEC	UDEC	BIN	OCT	HEX
0	0	0000	0	0
1	1	0001	1	1
2	2	0010	2	2
3	3	0011	3	3
4	4	0100	4	4
5	5	0101	5	5
6	6	0110	6	6
7	7	0111	7	7
-8	8	1000	10	8
-7	9	1001	11	9
-6	10	1010	12	A
-5	11	1011	13	B
-4	12	1100	14	C
-3	13	1101	15	D
-2	14	1110	16	E
-1	15	1111	17	F

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

20

Binary Data Representation

- Number Systems

- Signed representation: *two's complement*

- to obtain the negative of any number in binary representation, ...

- ... invert all bits,
- ... and add 1

- Example: 4-bit two's complement

SDEC	UDEC	BIN	OCT	HEX
...
7	7	0111	7	7
-8	8	1000	10	8
-7	9	1001	11	9
...

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

21

Binary Data Representation

- Memory Segmentation

- typical (virtual) memory layout on processor with 4-byte words and 1 GB of memory

- Stack

- grows and shrinks dynamically
- function call hierarchy
- stack frames with local variables

- Heap

- “free” storage
- dynamic allocation by the user

- Data segment


- global (and static) variables

- Program segment

- stores binary program code

- Reserved area for operating system

bfff fffc

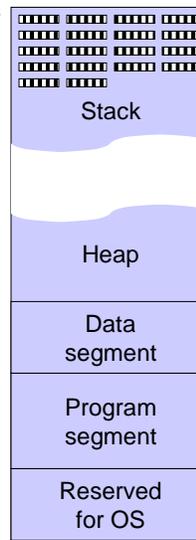

EECS10: Computational Methods in ECE, Lecture 20

(c) 2007 R. Doemer

22

Binary Data Representation

- Memory Segmentation
 - typical (virtual) memory layout on processor with 4-byte words and 1 GB of memory
- Memory errors
 - *Out of memory*
 - Stack and heap collide
 - *Segmentation fault*
 - access outside allocated segments
 - e.g. access to segment reserved for OS
 - *Bus error*
 - mis-aligned word access
 - e.g. word access to an address that is not divisible by 4

bfff fffc

Stack

Heap

Data segment

Program segment

Reserved for OS

0

EECS10: Computational Methods in ECE, Lecture 20 (c) 2007 R. Doemer 23