

EECS 10: Computational Methods in Electrical and Computer Engineering

Review of Lectures 9 - 17

Rainer Dömer

doemer@uci.edu

The Henry Samueli School of Engineering
Electrical Engineering and Computer Science
University of California, Irvine

Review of Lectures 9 - 17

- Lecture 9: Formatted output
- Lecture 10: Structured programming, conditions
- Lecture 11: Structured programming, loops
- Lecture 12: Jump statements, debugging
- Lecture 13: Functions, terms and concepts
- Lecture 14: Standard library functions
- Lecture 15: Functions, scope rules
- Lecture 16: Data structures, arrays
- Lecture 17: Passing arrays to functions, strings

Formatted Output

- Formatted output using `printf()`
 - standard format specifiers for integral values
 - `unsigned long long` `%llu`
 - `long long` `%lld`
 - `unsigned long` `%lu`
 - `long` `%ld`
 - `unsigned int` `%u`
 - `int` `%d`
 - `short` `%hd`
 - standard format specifiers for floating point values
 - `long double` `%Lf`
 - `double` `%f`
 - `float` `%f`

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

3

Formatted Output

- Detailed formatting sequence for integral values
 - `% flags width length conversion`
 - *flags*
 - (none) standard formatting (right-justified)
 - `-` left-justified output
 - `+` leading plus-sign for positive values
 - `0` leading zeros
 - field *width*
 - (none) minimum number of characters needed
 - integer width of field to be filled with output
 - *length* modifier
 - (none) `int` type
 - `h` `short int` type
 - `l` `long int` type
 - `ll` `long long int` type
 - *conversion* specifier
 - `d` signed decimal value
 - `u` unsigned decimal value
 - `o` (unsigned) octal value
 - `x` (unsigned) hexadecimal value using characters `0-9, a-f`
 - `X` (unsigned) hexadecimal value using characters `0-9, A-F`

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

4

Formatted Output

- Detailed formatting sequence for floating-point values
 - *% flags width precision length conversion*
 - **flags**
 - (none) standard formatting (right-justified)
 - - left-justified output
 - + leading plus-sign for positive values
 - 0 leading zeros
 - **field width**
 - (none) minimum number of characters needed
 - integer width of field to be filled with output
 - **precision**
 - (none) default precision (e.g. 6)
 - .int number of digits after decimal point (for **f**, **e**, or **E**), maximum number of significant digits (for **g**, or **G**)
 - **length** modifier
 - (none) float or double type
 - L long double type
 - **conversion** specifier
 - **f** standard floating-point notation (fixed-point)
 - **e** or **E** exponential notation using (**e** or **E**)
 - **g** or **G** standard or exponential notation (using **e** or **E**)

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

5

Formatted Output

- Program example: `Formatting.c` (part 1/2)

```

/* Formatting.c: formatted output demo          */
/* author: Rainer Doemer                      */
/* modifications:                             */
/* 10/19/04 RD initial version                */

#include <stdio.h>

/* main function */

int main(void)
{
    /* output section */
    printf("42 formatted as |%d|: |%d|\n", 42);
    printf("42 formatted as |%8d|: |%8d|\n", 42);
    printf("42 formatted as |%-8d|: |%-8d|\n", 42);
    printf("42 formatted as |%+8d|: |%+8d|\n", 42);
    printf("42 formatted as |%08d|: |%08d|\n", 42);
    printf("42 formatted as |%x|: |%x|\n", 42);
    printf("42 formatted as |%o|: |%o|\n", 42);
    ...
}

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

6

Formatted Output

- Program example: `Formatting.c` (part 2/2)

```

...
printf("\n");
printf("123.456 formatted as |%f|:      |%f|\n", 123.456);
printf("123.456 formatted as |%e|:      |%e|\n", 123.456);
printf("123.456 formatted as |%g|:      |%g|\n", 123.456);
printf("123.456 formatted as |%12.4f|: |%12.4f|\n",
      123.456);
printf("123.456 formatted as |%12.4e|: |%12.4e|\n",
      123.456);
printf("123.456 formatted as |%12.4g|: |%12.4g|\n",
      123.456);

/* exit */
return 0;
} /* end of main */

/* EOF */

```

Formatted Output

- Example session: `Formatting.c`

```

% vi Formatting.c
% gcc Formatting.c -o Formatting -Wall -ansi
% Formatting
42 formatted as |%d|: |42|
42 formatted as |%8d|: |      42|
42 formatted as |%-8d|: |42      |
42 formatted as |%+8d|: |      +42|
42 formatted as |%08d|: |00000042|
42 formatted as |%x|: |2a|
42 formatted as |%o|: |52|

123.456 formatted as |%f|: |123.456000|
123.456 formatted as |%e|: |1.234560e+02|
123.456 formatted as |%g|: |123.456|
123.456 formatted as |%12.4f|: |      123.4560|
123.456 formatted as |%12.4e|: |  1.2346e+02|
123.456 formatted as |%12.4g|: |      123.5|
%

```

Programming Principles

- Thorough *understanding* of the problem
- *Problem definition*
 - Input data
 - Output data
- *Algorithm*: Procedure to solve the problem
 - Detailed set of *actions* to perform
 - Specification of *order* in which to perform the actions
 - Termination after a *finite* number of steps
- *Pseudo code*: Planning a program
 - Informal (English) description of steps in an algorithm
 - Example: Cake baking recipe
- *Control flow*
 - Execution order of statements in the program
- *Program*: Instructions for the computer
 - Formal description in programming language
 - Statements (steps, actions)
 - Control structures (flow of control)


EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

9

Structured Programming

- Control flow charts
 - Graphical representation of program control flow
 - Example:

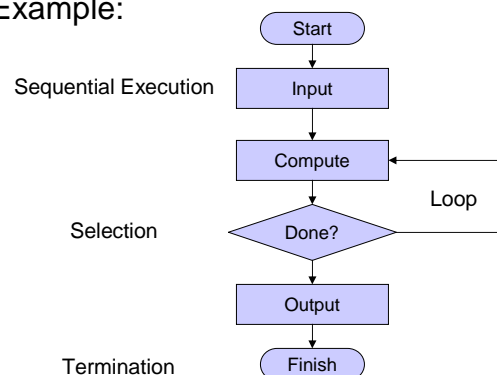

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer


10

Structured Programming

- Empty statement blocks
 - empty compound statement
 - does nothing (no operation, no-op)
 - Example:

Flow chart:

```
{
  /* nothing */
}
```



EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer


11

Structured Programming

- Sequential execution in C
 - Statement blocks: *Compound statements*
 - Sequence of statements grouped by braces: { }
- Example:

Flow chart:

```
{
  /* statement 1 */
  /* statement 2 */
  /* statement 3 */
  /* ... */
  /* statement n */
}
```



EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

12

Structured Programming

- Sequential execution in C
 - Statement blocks: *Compound statements*
 - Sequence of statements grouped by braces: { }
- *Indentation* increases readability of the code
 - proper indentation is highly recommended!
- Example:

```

/* some statements... */
if (x < 0) {
    printf("%d is negative!", x);
    /* handle negative values of x... */
    if (x < 100) {
        printf("%d is too small!", x);
        /* handle the problem... */
    } /* fi */
} /* fi */
if (x > 0) {
    printf("%d is positive!", x);
    /* handle positive values of x... */
} /* fi */
/* more statements... */

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

13

Structured Programming

- Sequential execution in C
 - Statement blocks: *Compound statements*
 - Sequence of statements grouped by braces: { }
- *Indentation* increases readability of the code
 - proper indentation is highly recommended!
- Example:

```

/* some statements... */
if (x < 0) {
    printf("%d is negative!", x);
    /* handle negative values of x... */
    if (x < 100) {
        printf("%d is too small!", x);
        /* handle the problem... */
    } /* fi */
} /* fi */
if (x > 0) {
    printf("%d is positive!", x);
    /* handle positive values of x... */
} /* fi */
/* more statements... */

```

indentation level 0

indentation level 1 →

indentation level 2 → →

indentation level 1 →

indentation level 0

indentation level 1 →

indentation level 0

EECS10: Computational Methods in ECE, Review 9-17


(c) 2006 R. Doemer

14

Structured Programming

- Selection: **if** statement

– Flow chart:



– Example:


```

if (grade >= 60)
{ printf("You passed.");
} /* fi */
  
```

Structured Programming

- Selection: **if-else** statement

– Flow chart:

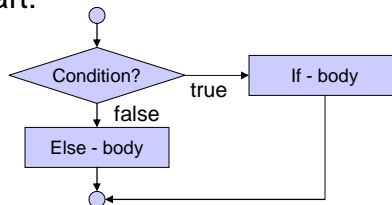

– Example:


```

if (grade >= 60)
{ printf("You passed.");
} /* fi */
else
{ printf("You failed.");
} /* esle */
  
```


Structured Programming

- Selection: **switch** statement

– Flow chart:

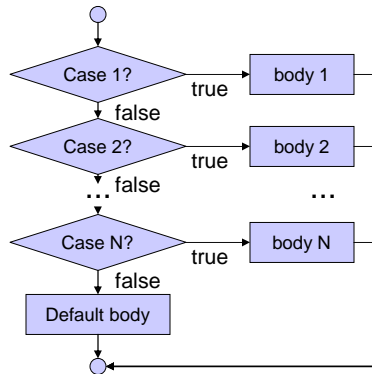

Example:

```

switch(LetterGrade)
{ case 'A':
  { printf("Excellent!");
    break; }
  case 'B':
  case 'C':
  case 'D':
  { printf("Passed.");
    break; }
  case 'F':
  { printf("Failed!");
    break; }
  default:
  { printf("Invalid grade!");
    break; }
} /* hctiws */
  
```

EECS10: Computational Methods in ECE, Review 9-17


(c) 2006 R. Doemer

17

Structured Programming

- Selection: **break** in **switch** statement

– Flow chart:

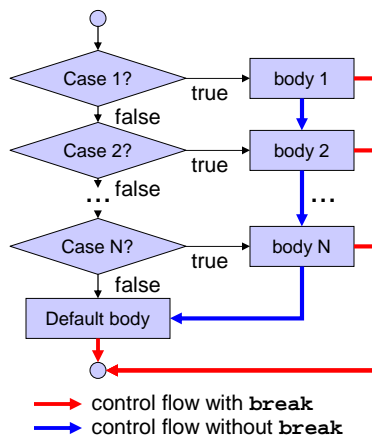

Example:

```

switch(LetterGrade)
{ case 'A':
  { printf("Excellent!");
    break; }
  case 'B':
  case 'C':
  case 'D':
  { printf("Passed.");
    break; }
  case 'F':
  { printf("Failed!");
    break; }
  default:
  { printf("Invalid grade!");
    break; }
} /* hctiws */
  
```

EECS10: Computational Methods in ECE, Review 9-17


(c) 2006 R. Doemer

18

Structured Programming

- Repetition: **while** loop

- Flow chart:



- Example:

```
int product = 2;
while (product < 1000)
{ product *= 2;
} /* elihw */
```


- Note:

- The condition is evaluated at the *beginning* of each loop!

Structured Programming

- Repetition: **break/continue** in **while** loop

- Flow chart:



- Control flow:

- control flow with **break**
- control flow with **continue**


- Note:

- The condition is evaluated at the *beginning* of each loop!

Structured Programming

- Repetition: **do-while** loop

– Flow chart:



– Example:

```
int product = 2;
do { product *= 2;
    } while (product < 1000);
```


– Note:

- The condition is evaluated at the *end* of each loop!

Structured Programming

- Repetition: **break/continue** in **do-while** loop

– Flow chart:



– Control flow:

- control flow with **break**
- control flow with **continue**


– Note:

- The condition is evaluated at the *end* of each loop!

Structured Programming

- Repetition: **for** loop

– Flow chart:

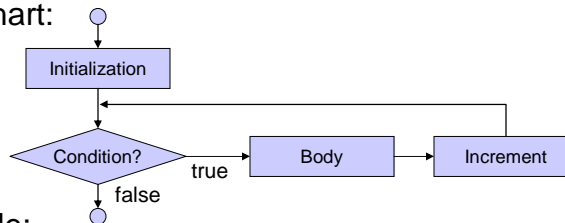

– Example:

```

for(i = 0; i < 10; i++)
{ printf("i = %d\n", i);
} /* rof */
  
```


– Syntax:

- `for(initialization; condition; increment)`
`body`

Structured Programming

- Repetition: **break/continue** in **for** loop

– Flow chart:

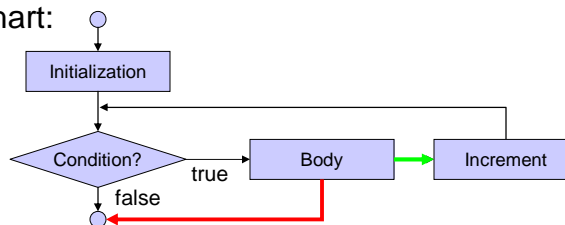

– Control flow:

→ control flow with **break**

→ control flow with **continue**

– Syntax:

- `for(initialization; condition; increment)`
`body`

Arbitrary Jump Statements

- Arbitrary jumps: `goto` statement
 - `goto` statement jumps to the specified *labeled* statement (within the same function)

– Example:


```
begin:  count = 0;
        goto next;
repeat: if (count > 100)
        { goto end; }
next:   count++;
        if (count == 77)
        { goto next; }
        goto repeat;
end:    printf("%d", count);
```

– Warning:

- `goto` statement allows *un-structured* programming!
- `goto` statement should be avoided whenever possible!


Structured Program Composition

- Initial flow chart
 - Start
 - Program body
 - Finish
- Statement sequences
 - Statement blocks can be concatenated
 - Sequential execution
- Nested control structures
 - control structures can be placed wherever statement blocks can be placed in the code

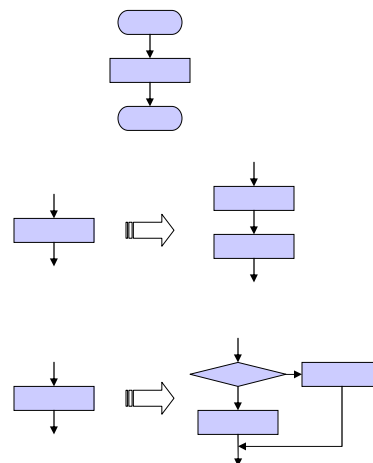

Structured Program Composition

- Example:
 - Initial flow chart




```
graph TD; Start([Start]) --> Process[Process]; Process --> End([End]);
```

The diagram shows a simple linear flow chart. It starts with a blue oval at the top, followed by a vertical arrow pointing down to a blue rectangular process box. Another vertical arrow points down from the process box to a final blue oval at the bottom.

EECS10: Computational Methods in ECE, Review 9-17 (c) 2006 R. Doemer 27

Structured Program Composition

- Example:
 - Sequential composition



```
graph TD; Start([Start]) --> Process1[Process 1]; Process1 --> Process2[Process 2]; Process2 --> End([End]);
```

The diagram shows a flow chart with sequential composition. It starts with a blue oval at the top, followed by a vertical arrow pointing down to a blue rectangular process box. A second vertical arrow points down from this box to another blue rectangular process box. A dashed rectangular box encloses both process boxes. A final vertical arrow points down from the second process box to a blue oval at the bottom.

EECS10: Computational Methods in ECE, Review 9-17 (c) 2006 R. Doemer 28

Structured Program Composition

- Example:
 - insertion of another sequential statement

The flowchart illustrates a sequential process. It starts with an oval representing the beginning of the program. An arrow points down to a rectangular process box. This box is enclosed in a dashed-line rectangle, indicating it is the target for modification. Below this dashed box is another rectangular process box. An arrow points down from the second box to a third rectangular process box. Finally, an arrow points down to an oval representing the end of the program.

EECS10: Computational Methods in ECE, Review 9-17 (c) 2006 R. Doemer 29

Structured Program Composition

- Example:
 - insertion of **if-else** statement

The flowchart illustrates a program structure with a conditional branch. It starts with an oval representing the beginning of the program. An arrow points down to a rectangular process box. Below this is a diamond-shaped decision box, also enclosed in a dashed-line rectangle to indicate it is the target for modification. An arrow points down from the decision box to a rectangular process box. To the right of the decision box is another rectangular process box. An arrow points from the right side of the decision box to this second process box. From the bottom of the second process box, an arrow points down and then left, merging back into the main vertical flow below the first process box. Finally, an arrow points down to an oval representing the end of the program.

EECS10: Computational Methods in ECE, Review 9-17 (c) 2006 R. Doemer 30

Structured Program Composition

- Example:
 - insertion of sequential statement

The flowchart illustrates the insertion of a sequential statement into a loop. It starts with a start node (oval), followed by a process node (rectangle), a decision node (diamond), and another process node (rectangle). A loop is formed by a process node (rectangle) and a decision node (diamond) connected by arrows. A dashed box highlights the process node and decision node of the loop. An arrow from the decision node of the loop points to a new process node (rectangle) that is inserted into the loop. The flowchart ends with a process node (rectangle) and a stop node (oval).

EECS10: Computational Methods in ECE, Review 9-17 (c) 2006 R. Doemer 31

Structured Program Composition

- Example:
 - insertion of **if-else** statement

The flowchart illustrates the insertion of an if-else statement into a loop. It starts with a start node (oval), followed by a process node (rectangle), a decision node (diamond), and another process node (rectangle). A loop is formed by a process node (rectangle) and a decision node (diamond) connected by arrows. A dashed box highlights the process node and decision node of the loop. An arrow from the decision node of the loop points to a new decision node (diamond) that is inserted into the loop. This new decision node has two outgoing arrows, each leading to a process node (rectangle). The flowchart ends with a process node (rectangle) and a stop node (oval).

EECS10: Computational Methods in ECE, Review 9-17 (c) 2006 R. Doemer 32

Structured Program Composition

- Example:
 - insertion of sequential statement

The flowchart shows a sequence of operations: a start node, a process box, a decision diamond, a process box, a decision diamond, a process box, a loop body (two process boxes), a decision diamond, a process box, and an end node. A dashed box highlights the loop body. An arrow from the top decision diamond points to the first process box of the loop body. An arrow from the bottom decision diamond points to the process box following the loop body.

EECS10: Computational Methods in ECE, Review 9-17 (c) 2006 R. Doemer 33

Structured Program Composition


- Example:
 - insertion of sequential statement (twice)

The flowchart is similar to the previous one, but the loop body now contains three process boxes instead of two. A dashed box highlights the loop body. An arrow from the top decision diamond points to the first process box of the loop body. An arrow from the bottom decision diamond points to the process box following the loop body.

EECS10: Computational Methods in ECE, Review 9-17 (c) 2006 R. Doemer 34

Structured Program Composition

- Example:
 - insertion of **switch** statement
 - etc. ...

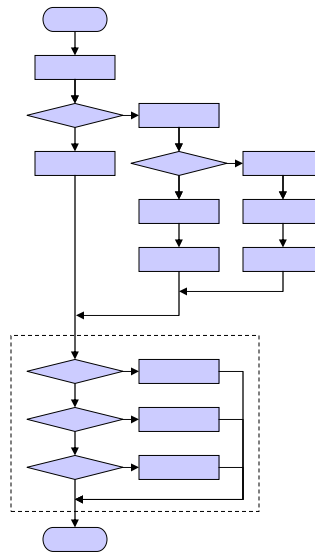

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

35

Example Program

- Grade calculation: `Grade.c` (part 1/3)

```

/* Grade.c: convert score into letter grade */
/* author: Rainer Doemer */
/* modifications: */
/* 10/17/04 RD initial version */

#include <stdio.h>

/* main function */
int main(void)
{
    /* variable definitions */
    int score = 0;
    char grade;

    /* input section */
    while (score < 1 || score > 100)
    { printf("Please enter your score (1-100): ");
      scanf("%d", &score);
    } /* elihw */

    ...
  
```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

36

Example Program

- Grade calculation: `Grade.c` (part 2/3)

```
...
/* computation section */
if (score >= 90)
  { grade = 'A'; }
else
  { if (score >= 80)
    { grade = 'B'; }
    else
      { if (score >= 70)
        { grade = 'C'; }
        else
          { if (score >= 60)
            { grade = 'D'; }
            else
              { grade = 'F'; }
            } /* esle */
          } /* esle */
        } /* esle */
      } /* esle */
    } /* esle */
  } /* esle */
...

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

37

Example Program

- Grade calculation: `Grade.c` (part 3/3)

```
...
/* output section */
printf("Your letter grade is %c.\n", grade);

/* exit */
return 0;
} /* end of main */

/* EOF */

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

38

Example Program

- Example session: `Grade.c`

```
% vi Grade.c
% gcc Grade.c -o Grade -Wall -ansi
% Grade
Please enter your score (1-100): 111
Please enter your score (1-100): 99
Your letter grade is A.
% Grade
Please enter your score (1-100): 85
Your letter grade is B.
% Grade
Please enter your score (1-100): 71
Your letter grade is C.
% Grade
Please enter your score (1-100): 69
Your letter grade is D.
% Grade
Please enter your score (1-100): 55
Your letter grade is F.
%
```

Example Program

- Grade calculation: `Grade2.c` (part 1/3)

```
/* Grade2.c: convert score into letter grade */
/* author: Rainer Doemer */
/* modifications: */
/* 10/18/04 RD use 'switch' statement */
/* 10/17/04 RD initial version */

#include <stdio.h>

/* main function */
int main(void)
{
    /* variable definitions */
    int score = 0;
    char grade;

    /* input section */
    while (score < 1 || score > 100)
    { printf("Please enter your score (1-100): ");
      scanf("%d", &score);
    } /* elihw */
}
```

Example Program

- Grade calculation: `Grade2.c` (part 2/3)

```
.../* computation section */
switch (score / 10)
{ case 10:
  case 9:
    { grade = 'A';
      break; }
  case 8:
    { grade = 'B';
      break; }
  case 7:
    { grade = 'C';
      break; }
  case 6:
    { grade = 'D';
      break; }
  default:
    { grade = 'F';
      break; }
} /* hctiws */
```

EECS ...

Example Program

- Grade calculation: `Grade2.c` (part 3/3)

```
...

/* output section */
printf("Your letter grade is %c.\n", grade);

/* exit */
return 0;
} /* end of main */

/* EOF */
```

Example Program

- Example session: `Grade2.c`

```
% cp Grade.c Grade2.c
% vi Grade2.c
% gcc Grade2.c -o Grade2 -Wall -ansi
% Grade2
Please enter your score (1-100): 111
Please enter your score (1-100): 99
Your letter grade is A.
% Grade2
Please enter your score (1-100): 85
Your letter grade is B.
% Grade2
Please enter your score (1-100): 71
Your letter grade is C.
% Grade2
Please enter your score (1-100): 69
Your letter grade is D.
% Grade2
Please enter your score (1-100): 55
Your letter grade is F.
%
```

Programming == Thinking

- Programming ...
 - ... is *not* a mechanic procedure!
 - ... requires *thinking!*
- Program ...
 - ... *writing* requires an *intelligent human being!*
 - ... *execution* can be done by a *dumb machine.*
- General programming steps:
 1. Understand the problem
 2. Define the input and output data
 3. Develop the algorithm (e.g. use pseudo code)
 4. Define the control flow (e.g. use control flow charts)
 5. Write the program in programming language
 6. Test and debug the program

Example Program

- Compound interest: **Interest.c**
- Assignment:
 - Write a program that calculates the interest accumulated in a savings account. Given an initial deposit amount and an annual percentage rate (APR), compute the yearly interest earned and the resulting balance, for a period of ten years.
 - The output should be listed in a table as follows:

```
Interest for year 1 is $ 45.00, total balance is $ 1045.00.
Interest for year 2 is $ 47.02, total balance is $ 1092.03.
Interest for year 3 is $ 49.14, total balance is $ 1141.17.
...
```

Example Program

- Compound interest: **Interest.c**
- Assignment:
 - Write a program that calculates the interest accumulated in a savings account. Given an initial deposit amount and an annual percentage rate (APR), compute the yearly interest earned and the resulting balance, for a period of ten years.
- Step 1: Understand the problem
 - What is given?
 - deposit amount, annual percentage rate
 - What is asked for?
 - yearly interest, resulting balance
 - How to we get what is asked for?
 - $interest = amount * APR/100$
 - $balance = amount + interest$

Example Program

- Compound interest: **Interest.c**
- Assignment:
 - Write a program that calculates the interest accumulated in a savings account. Given an initial deposit amount and an annual percentage rate (APR), compute the yearly interest earned and the resulting balance, for a period of ten years.
- Step 2: Define the input and output data
 - Input:
 - Initial deposit amount: floating point value, “amount”
 - Annual percentage rate: floating point value, “rate”
 - Output:
 - Current year: integral value, “year”
 - Interest earned: floating point value, “interest”
 - Resulting balance: floating point value, “balance”

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

47

Example Program

- Compound interest: **Interest.c**
- Assignment:
 - Write a program that calculates the interest accumulated in a savings account. Given an initial deposit amount and an annual percentage rate (APR), compute the yearly interest earned and the resulting balance, for a period of ten years.
- Step 3: Develop the algorithm
 - First, input “amount” and “rate”
 - Next, compute “interest”
 - Next, compute new “balance”
 - Print “interest” and “balance” on screen
 - Repeat last 3 steps for 10 years
 - Done!

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

48

Example Program

- Compound interest: **Interest.c**
- Assignment:
 - Write a program that calculates the interest accumulated in a savings account. Given an initial deposit amount and an annual percentage rate (APR), compute the yearly interest earned and the resulting balance, for a period of ten years.
- Step 4: Define the control flow
 - First, input “amount” and “rate”
 - Repeat for 10 years:
 - Next, compute “interest”
 - Next, compute new “balance”
 - Print “interest” and “balance” on screen
 - Update amount for the next year
 - Done!

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

49

Example Program

- Compound interest: **Interest.c**
- Assignment:
 - Write a program that calculates the interest accumulated in a savings account. Given an initial deposit amount and an annual percentage rate (APR), compute the yearly interest earned and the resulting balance, for a period of ten years.
- Step 5: Write the program in programming language

```
double amount;      double rate;      int year;
double interest;    double balance;

printf("Please enter the initial amount in $: ");
scanf("%lf", &amount);

printf("Please enter the interest rate in %% : ");
scanf("%lf", &rate);
```

etc.

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

50

Example Program

- Compound interest: `Interest.c` (part 1/2)

```

/* Interest.c: compound interest on savings account */
/* author: Rainer Doemer */
/* modifications: */
/* 10/18/06 RD distinguish amount and balance */
/* 10/19/04 RD initial version */

#include <stdio.h>

/* main function */
int main(void)
{
    /* variable definitions */
    double amount, balance, rate, interest;
    int year;

    /* input section */
    printf("Please enter the initial amount in $: ");
    scanf("%lf", &amount);
    printf("Please enter the interest rate in %% : ");
    scanf("%lf", &rate);
    ...

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

51

Example Program

- Compound interest: `Interest.c` (part 2/2)

```

...

/* computation and output section */
for(year = 1; year <= 10; year++)
{
    interest = amount * (rate/100.0);
    balance = amount + interest;
    printf("Interest for year %2d is $%8.2f,"
           " total balance is $%8.2f.\n",
           year, interest, balance);
    amount = balance;
} /* rof */

/* exit */
return 0;
} /* end of main */

/* EOF */

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

52

Example Program

- Compound interest: **Interest.c**
- Assignment:
 - Write a program that calculates the interest accumulated in a savings account. Given an initial deposit amount and an annual percentage rate (APR), compute the yearly interest earned and the resulting balance, for a period of ten years.
- Step 6: Test (and debug) the program
 - see next slide!

Example Program

- Example session: **Interest.c**

```
% vi Interest.c
% gcc Interest.c -o Interest -Wall -ansi
% Interest
Please enter the initial amount in $: 1500
Please enter the interest rate in % : 1.5
Interest for year 1 is $ 22.50, total balance is $ 1522.50.
Interest for year 2 is $ 22.84, total balance is $ 1545.34.
Interest for year 3 is $ 23.18, total balance is $ 1568.52.
Interest for year 4 is $ 23.53, total balance is $ 1592.05.
Interest for year 5 is $ 23.88, total balance is $ 1615.93.
Interest for year 6 is $ 24.24, total balance is $ 1640.16.
Interest for year 7 is $ 24.60, total balance is $ 1664.77.
Interest for year 8 is $ 24.97, total balance is $ 1689.74.
Interest for year 9 is $ 25.35, total balance is $ 1715.08.
Interest for year 10 is $ 25.73, total balance is $ 1740.81.
%
```

Debugging

- Source-level Debugger **`gdb`**
 - Debugging features
 - run the program under debugger control
 - follow the control flow of the program during execution
 - set breakpoints to stop execution at specific points
 - inspect (and adjust) the values of variables
 - find the point in the program where the “crash” happens
 - Preparation:
 - compile your program with debugging support on
 - Option **`-g`** tells compiler to add debugging information (symbol tables) to the generated executable file
 - **`gcc -g Program.c -o Program`**
 - **`gdb Program`**

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

55

Debugging

- Source-level Debugger **`gdb`**
 - Basic **`gdb`** commands
 - **`run`**
 - starts the execution of the program in the debugger
 - **`break function_name`**
 - inserts a breakpoint at *function_name*
 - program execution will stop at the breakpoint
 - **`list line_numbers`**
 - lists the current or specified *line_numbers*
 - **`print variable_name`**
 - prints the current value of the variable *variable_name*
 - **`next`**
 - executes the next statement (one statement at a time)
 - **`quit`**
 - exits the debugger (and terminates the program)
 - **`help`**
 - provides helpful details on debugger commands

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

56

Example Program

- Compound interest: `Interest2.c` (part 1/2)

```

/* Interest2.c: compound interest on savings account */
/* author: Rainer Doemer */
/* modifications: */
/* 10/23/05 RD version to demonstrate debugging */
/* 10/19/04 RD initial version */

#include <stdio.h>

/* main function */
int main(void)
{
    /* variable definitions */
    double amount, balance, rate, interest;
    int year;

    /* input section */
    printf("Please enter the initial amount in $:\n");
    scanf("%lf", &amount);
    printf("Please enter the interest rate in %:\n");
    scanf("%lf", &rate);

```

EECS ...

Example Program

- Compound interest: `Interest2.c` (part 2/2)

```

...

/* computation and output section */
for(year = 1; year <= 10; year++)
{
    interest = amount * (rate/100.0);
    balance = amount + interest;
    printf("Interest for year%3d is $%8.2f.\n", year,
           interest);
    printf("The new balance is $%8.2f.\n", balance);
    amount = balance;
} /* rof */

/* exit */
return 0;
} /* end of main */

/* EOF */

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

58

Example Program

- Example session: `Interest2.c` (part 1/6)

```
% vi Interest2.c
% gcc Interest2.c -o Interest2 -g -Wall -ansi
% Interest2
Please enter the initial amount in $:
1000
Please enter the interest rate in %:
1.5
Interest for year 1 is $ 15.00.
The new balance is $ 1015.00.
Interest for year 2 is $ 15.22.
The new balance is $ 1030.22.
...
Interest for year 10 is $ 17.15.
The new balance is $ 1160.54.
% gdb Interest2
GNU gdb 6.3
Copyright 2004 Free Software Foundation, Inc.
GDB is free software, ...
There is absolutely no warranty for GDB.
This GDB was configured as "sparc-sun-solaris2.7"...
(gdb)
...
```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

59

Example Program

- Example session: `Interest2.c` (part 2/6)

```
...
(gdb) break main
Breakpoint 1 at 0x106ac: file Interest2.c, line 20.
(gdb) run
Starting program: /users/faculty/doemer/eecs10/Interest/Interest2
Breakpoint 1, main () at Interest2.c:20
20     printf("Please enter the initial amount in $:\n");
(gdb) next
Please enter the initial amount in $:
21     scanf("%lf", &amount);
(gdb) next
1000
22     printf("Please enter the interest rate in %:\n");
(gdb) next
Please enter the interest rate in %:
23     scanf("%lf", &rate);
(gdb) next
1.5
26     for(year = 1; year <= 10; year++)
(gdb) next
...
```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

60

Example Program

- Example session: `Interest2.c` (part 3/6)

```

...
27 { interest = amount * (rate/100.0);
(gdb) next
28   balance = amount + interest;
(gdb) print interest
$1 = 15
(gdb) print amount
$2 = 1000
(gdb) print balance
$3 = -7.3987334479772013e+304
(gdb) next
29   printf("Interest for year%3d is $%8.2f.\n", year, interest);
(gdb) print balance
$4 = 1015
(gdb) next
Interest for year 1 is $ 15.00.
30   printf("The new balance is      $%8.2f.\n", balance);
(gdb) next
The new balance is      $ 1015.00.
31   amount = balance;
(gdb) next
...

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

61

Example Program

- Example session: `Interest2.c` (part 4/6)

```

...
26 for(year = 1; year <= 10; year++)
(gdb) next
27 { interest = amount * (rate/100.0);
(gdb) print year
$5 = 2
(gdb) list
22 printf("Please enter the interest rate in %:\n");
23 scanf("%lf", &rate);
24
25 /* computation and output section */
26 for(year = 1; year <= 10; year++)
27 { interest = amount * (rate/100.0);
28   balance = amount + interest;
29   printf("Interest for year%3d is $%8.2f.\n", year, interest);
30   printf("The new balance is      $%8.2f.\n", balance);
31   amount = balance;
(gdb) list 35
30   printf("The new balance is      $%8.2f.\n", balance);
31   amount = balance;
32 } /* rof */
...

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

62

Example Program

- Example session: `Interest2.c` (part 5/6)

```
...
33
34 /* exit */
35 return 0;
36 } /* end of main */
37
38 /* EOF */
(gdb) break 35
Breakpoint 2 at 0x1079c: file Interest2.c, line 35.
(gdb) cont
Continuing.
Interest for year 2 is $ 15.22.
The new balance is $ 1030.22.
Interest for year 3 is $ 15.45.
The new balance is $ 1045.68.
...
Interest for year 10 is $ 17.15.
The new balance is $ 1160.54.

Breakpoint 2, main () at Interest2.c:35
35 return 0;
...
```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

63

Example Program

- Example session: `Interest2.c` (part 6/6)

```
...
(gdb) print balance
$6 = 1160.5408250251503
(gdb) cont
Continuing.

Program exited normally.
(gdb) quit
%
```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

64

Functions

- Introduction to Functions
 - Important programming concepts
 - Hierarchy
 - Encapsulation
 - Information hiding
 - Divide and conquer
 - Software reuse
 - Don't re-invent the wheel!
 - Program composition
 - C program = Set of functions
 - starting point: function named `main`
 - Libraries = Set of functions
 - predefined functions (possibly written by somebody else)

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

65

Functions

- C programming language distinguishes 3 constructs
 - Function declaration
 - declaration of function name, parameters, and return type
 - Function definition
 - extension of a function declaration with a function body
 - definition of the function behavior
 - Function call
 - invocation of a function
- C program rules
 - A function must be declared before it can be called.
 - Multiple function declarations are allowed (if they match).
 - A function definition is an implicit function declaration.
 - A function must be defined exactly once in a program.
 - A function may be called any number of times.

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

66

Functions

- Function declaration
 - aka. function prototype or function signature
 - declares
 - function name
 - function parameters
 - type of return value
- Example:

```
double Square(double a);
```

 - function is named **Square**
 - function takes one parameter **a** of type **double**
 - function returns a value of type **double**

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

67

Functions

- Function definition
 - extends a function declaration with a function body
 - defines the statements executed by the function
 - may use local variables for the computation
 - returns result value via **return** statement (if any)
- Example:

```
double Square(double a)
{
    double r;
    r = a * a;
    return r;
}
```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

68

Functions

- Function call
 - expression invoking a function
 - supplies arguments for formal parameters
 - invokes the function
 - result is the value returned by the function
- Example:

```
double x, y;
y = Square(x);
```

- function `Square` is called
- argument `x` is passed for parameter `a` (by value)
- value returned by the function is assigned to `y`

Functions

- Program example: `square.c` (part 1/2)

```
/* Square.c: example demonstrating functions */
/*                                          */
/* author: Rainer Doemer                  */
/*                                          */
/* modifications:                          */
/* 10/27/04 RD initial version            */
/*                                          */

#include <stdio.h>

/* function declaration */
double square(double a);

/* function definition */
double square(double a)
{
    return a * a;
} /* end of square */

...
```

Functions

- Program example: `square.c` (part 2/2)

```
...
/* main function */
int main(void)
{ /* variable definitions */
  double x, y;

  /* input section */
  printf("Please enter a value for x: ");
  scanf("%lf", &x);

  /* computation section */
  y = square(x);

  /* output section */
  printf("The square of %g is %g\n", x, y);

  /* exit */
  return 0;
} /* end of main */

/* EOF */
```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

71

Functions

- Example session: `square.c`

```
% vi Square.c
% gcc Square.c -o Square -Wall -ansi
% Square
Please enter a value for x: 3
The square of 3 is 9
% Square
Please enter a value for x: 5.5
The square of 5.5 is 30.25
%
```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

72

Functions

- Program example: `Cylinder.c` (part 1/3)

```
/* Cylinder.c: cylinder functions */
/* author: Rainer Doemer */
/* modifications: */
/* 10/25/05 RD initial version */

#include <stdio.h>

/* cylinder functions */

double pi(void)
{
    return(3.1415927);
}

double CircleArea(double r)
{
    return(pi() * r * r);
}
...
```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

73

Functions

- Program example: `Cylinder.c` (part 2/3)

```
...
double CirclePerimeter(double r)
{
    return(2 * pi() * r);
}

double Surface(double r, double h)
{
    double side, lid;

    side = CirclePerimeter(r) * h;
    lid = CircleArea(r);

    return(side + 2*lid);
}

double Volume(double r, double h)
{
    return(CircleArea(r) * h);
}
...
```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

74

Functions

- Program example: `Cylinder.c` (part 3/3)

```
...
/* main function */
int main(void)
{
    double r, h, s, v;

    /* input section */
    printf("Please enter the radius: ");
    scanf("%lf", &r);
    printf("Please enter the height: ");
    scanf("%lf", &h);

    /* computation section */
    s = Surface(r, h);
    v = Volume(r, h);

    /* output section */
    printf("The surface area is %f.\n", s);
    printf("The volume is %f.\n", v);

    return 0;
} /* end of main */
```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

75

Functions

- Example session: `Cylinder.c`

```
% vi Cylinder.c
% gcc Cylinder.c -o Cylinder -Wall -ansi
% Cylinder
Please enter the radius: 5.0
Please enter the height: 8.0
The surface area is 408.407051.
The volume is 628.318540.
%
```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

76

Math Library Functions

- C standard math library
 - standard library supplied with every C compiler
 - predefined mathematical functions
 - e.g. $\cos(x)$, \sqrt{x} , etc.
- Math library header file
 - contains math function declarations
 - `#include <math.h>`
- Math library linker file
 - contains math function definitions (pre-compiled)
 - library file `libm.a`
 - compiler needs to *link* against the math library
 - use option `-l $libraryname$`
 - Example: `gcc MathProgram.c -o MathProgram -lm`

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

77

Math Library Functions

- Functions declared in `math.h` (part 1/2)
 - `double sqrt(double x);` \sqrt{x}
 - `double pow(double x, double y);` x^y
 - `double exp(double x);` e^x
 - `double log(double x);` $\log(x)$
 - `double log10(double x);` $\log_{10}(x)$
 - `double ceil(double x);` $\lceil x \rceil$
 - `double floor(double x);` $\lfloor x \rfloor$
 - `double fabs(double x);` $|x|$
 - `double fmod(double x, double y);` $x \bmod y$

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

78

Math Library Functions

- Functions declared in `math.h` (part 2/2)

- <code>double cos(double x);</code>	<i>cos(x)</i>
- <code>double sin(double x);</code>	<i>sin(x)</i>
- <code>double tan(double x);</code>	<i>tan(x)</i>
- <code>double acos(double x);</code>	<i>acos(x)</i>
- <code>double asin(double x);</code>	<i>asin(x)</i>
- <code>double atan(double x);</code>	<i>atan(x)</i>
- <code>double cosh(double x);</code>	<i>cosh(x)</i>
- <code>double sinh(double x);</code>	<i>sinh(x)</i>
- <code>double tanh(double x);</code>	<i>tanh(x)</i>

Math Library Functions

- Program example: `Function.c` (part 1/3)

```

/* Function.c: compute a math function table */
/* */
/* author: Rainer Doemer */
/* */
/* modifications: */
/* 10/28/04 RD initial version */

#include <stdio.h>
#include <math.h>

/* function definition */

double f(double x)
{
    return cos(x);
} /* end of f */

...

```


Math Library Functions

- Program example: `Function.c` (part 2/3)

```
...
/* main function */

int main(void)
{
    /* variable definitions */
    double hi, lo, step;
    double x, y;

    /* input section */
    printf("Please enter the lower bound: ");
    scanf("%lf", &lo);
    printf("Please enter the upper bound: ");
    scanf("%lf", &hi);
    printf("Please enter the step size:  ");
    scanf("%lf", &step);

    ...

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

81

Math Library Functions

- Program example: `Function.c` (part 3/3)

```
...

/* computation and output section */
for(x = lo; x <= hi; x += step)
{
    y = f(x);
    printf("f(%10g) = %10g\n", x, y);
} /* rof */

/* exit */
return 0;
} /* end of main */

/* EOF */

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

82

Math Library Functions

- Example session: `Function.c`

```
% vi Function.c
% gcc Function.c -o Function -Wall -ansi -lm
% Function
Please enter the lower bound: -0.5
Please enter the upper bound: 1.0
Please enter the step size: .1
f(   -0.5) =  0.877583
f(   -0.4) =  0.921061
f(   -0.3) =  0.955336
f(   -0.2) =  0.980067
f(   -0.1) =  0.995004
f(-2.77556e-17) =  1
f(    0.1) =  0.995004
f(    0.2) =  0.980067
f(    0.3) =  0.955336
f(    0.4) =  0.921061
f(    0.5) =  0.877583
f(    0.6) =  0.825336
f(    0.7) =  0.764842
f(    0.8) =  0.696707
f(    0.9) =  0.62161
f(    1) =  0.540302
%
```

Standard Library Functions

- Standard C library
 - standard library supplied with every C compiler
 - predefined standard functions
 - e.g. `printf()`, `scanf()`, etc.
- C library header files
 - input/output function declarations `#include <stdio.h>`
 - standard function declarations `#include <stdlib.h>`
 - time function declarations `#include <time.h>`
 - etc.
- C library linker file
 - contains standard function definitions (pre-compiled)
 - library file `libc.a`
 - compiler *automatically links* against the standard library (no need to supply extra options)

Standard Library Functions

- Functions declared in `stdlib.h` (partial list)
 - `int abs(int x);`
 - `long int labs(long int x);`
 - return the absolute value of a (long) integer `x`
 - `int rand(void);`
 - return a random value in the range 0 – `RAND_MAX`
 - `RAND_MAX` is a constant integer (e.g. 32767)
 - `void srand(unsigned int seed);`
 - initialize the random number generator with value `seed`
 - `void exit(int result);`
 - exit the program with return value `result`
 - `void abort(void);`
 - abort the program (with an error result)

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

85

Standard Library Functions

- Random number generation
 - Standard library provides *pseudo* random number generator
 - `int rand(void);`
 - Pseudo random numbers are a sequence of values seemingly random in the range 0 – `RAND_MAX`
 - Computer is a *deterministic* machine
 - Sequence will always be the same
 - Start of sequence is determined by *seed* value
 - `void srand(unsigned int seed);`
 - Trick: Initialize random sequence with current time
 - header file `time.h` declares function `unsigned int time()`
 - `time(0)` returns number of seconds since Jan 1, 1970
 - at beginning of program, use:
`srand(time(0));`

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

86

Standard Library Functions

- Program example: `Dice.c` (part 1/4)

```

/* Dice.c: roll the dice                                     */
/* author: Rainer Doemer                                     */
/* modifications:                                           */
/* 10/28/04 RD initial version                             */
/*                                                         */
#include <stdio.h>
#include <stdlib.h>
#include <time.h>

/* function definition */

int roll(void)
{
    int r;

    r = rand() % 6 + 1;
    /* printf("Rolled a %d.\n", r); */
    return r;
} /* end of roll */
...

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

87

Standard Library Functions

- Program example: `Dice.c` (part 2/4)

```

...
/* main function */

int main(void)
{
    /* variable definitions */
    int i, n;
    int count1 = 0, count2 = 0, count3 = 0,
        count4 = 0, count5 = 0, count6 = 0;

    /* random number generator initialization */
    srand(time(0));

    /* input section */
    printf("Roll the dice: How many times? ");
    scanf("%d", &n);

    ...

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

88

Standard Library Functions

- Program example: `Dice.c` (part 3/4)

```

... /* computation section */
for(i = 0; i < n; i++)
{ switch(roll())
  { case 1:
    { count1++; break; }
    case 2:
    { count2++; break; }
    case 3:
    { count3++; break; }
    case 4:
    { count4++; break; }
    case 5:
    { count5++; break; }
    case 6:
    { count6++; break; }
    default:
    { printf("INVALID ROLL!");
      exit(10); }
    } /* hctiws */
  } /* rof */
...

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

89

Standard Library Functions

- Program example: `Dice.c` (part 4/4)

```

...

/* output section */
printf("Rolled a 1 %5d times.\n", count1);
printf("Rolled a 2 %5d times.\n", count2);
printf("Rolled a 3 %5d times.\n", count3);
printf("Rolled a 4 %5d times.\n", count4);
printf("Rolled a 5 %5d times.\n", count5);
printf("Rolled a 6 %5d times.\n", count6);

/* exit */
return 0;
} /* end of main */

/* EOF */

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

90

Standard Library Functions

- Example session: `Dice.c`

```
% vi Dice.c
% gcc Dice.c -o Dice -Wall -ansi
% Dice
Roll the dice: How many times? 6000
Rolled a 1  963 times.
Rolled a 2  995 times.
Rolled a 3 1038 times.
Rolled a 4 1024 times.
Rolled a 5  984 times.
Rolled a 6  996 times.
% Dice
Roll the dice: How many times? 6000
Rolled a 1  977 times.
Rolled a 2 1043 times.
Rolled a 3 1012 times.
Rolled a 4 1001 times.
Rolled a 5  963 times.
Rolled a 6 1004 times.
%
```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

91

Functions

- Review: Terms and Concepts

- Function declaration
 - function prototype with name, parameters, and return type
- Function parameters
 - formal parameters holding the data supplied to a function
- Function definition
 - definition of function behavior in function body
- Local variables
 - variables defined locally in a function body
- Function call
 - expression invoking a function with supplied arguments
- Function arguments
 - arguments passed as parameters to a function call
- Return value
 - result computed by the function call

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

92

Functions

- *Scope of an identifier*
 - Portion of program where the identifier can be referenced
 - aka. accessibility, visibility
- *Scope rules*
 - Global variables: *file scope*
 - Declaration outside any function (at global level)
 - Scope in entire source file after declaration
 - Function parameters: *function scope*
 - Declaration in function parameter list
 - Scope limited to this function body (entirely)
 - Local variables: *block scope*
 - Declaration inside a compound statement (i.e. function body)
 - Scope limited to this compound statement block (entirely)

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

93

Scope Rules: Example

<code>#include <stdio.h></code>	Header file inclusion
<code>int square(int a);</code> <code>int add_y(int x);</code>	Function declarations
<code>int x = 5,</code> <code> y = 7;</code>	Global variables
<code>int square(int a)</code> <code>{ int s;</code> <code> s = a * a;</code> <code> return s;</code> <code>}</code>	Function definition Local variable
<code>int add_y(int x)</code> <code>{ int s;</code> <code> s = x + y;</code> <code> return s;</code> <code>}</code>	Function definition Local variable
<code>int main(void)</code> <code>{ int z;</code> <code> z = square(x);</code> <code> z = add_y(z);</code> <code> printf("%d\n", z);</code> <code> return 0;</code> <code>}</code>	Function definition Local variable

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

94

Scope Rules: Example

```
#include <stdio.h>
int square(int a);
int add_y(int x);
int x = 5,
    y = 7;
int square(int a)
{
    int s;
    s = a * a;
    return s;
}
int add_y(int x)
{
    int s;
    s = x + y;
    return s;
}
int main(void)
{
    int z;
    z = square(x);
    z = add_y(z);
    printf("%d\n", z);
    return 0;
}
```

Scope of global functions
`printf()`, `scanf()`, etc.

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

95

Scope Rules: Example

```
#include <stdio.h>
int square(int a);
int add_y(int x);
int x = 5,
    y = 7;
int square(int a)
{
    int s;
    s = a * a;
    return s;
}
int add_y(int x)
{
    int s;
    s = x + y;
    return s;
}
int main(void)
{
    int z;
    z = square(x);
    z = add_y(z);
    printf("%d\n", z);
    return 0;
}
```

Scope of global function
`square()`

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

96

Scope Rules: Example

```
#include <stdio.h>
int square(int a);
int add_y(int x);

int x = 5,
    y = 7;

int square(int a)
{
    int s;
    s = a * a;
    return s;
}

int add_y(int x)
{
    int s;
    s = x + y;
    return s;
}

int main(void)
{
    int z;
    z = square(x);
    z = add_y(z);
    printf("%d\n", z);
    return 0;
}
```

Scope of global function
`add_y()`

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

97

Scope Rules: Example

```
#include <stdio.h>
int square(int a);
int add_y(int x);

int x = 5,
    y = 7;

int square(int a)
{
    int s;
    s = a * a;
    return s;
}

int add_y(int x)
{
    int s;
    s = x + y;
    return s;
}

int main(void)
{
    int z;
    z = square(x);
    z = add_y(z);
    printf("%d\n", z);
    return 0;
}
```

Scope of global variable
`x`

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

98

Scope Rules: Example

```
#include <stdio.h>
int square(int a);
int add_y(int x);
int x = 5,
    y = 7;

int square(int a)
{
    int s;
    s = a * a;
    return s;
}

int add_y(int x)
{
    int s;
    s = x + y;
    return s;
}

int main(void)
{
    int z;
    z = square(x);
    z = add_y(z);
    printf("%d\n", z);
    return 0;
}
```

Scope of global variable
y

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

99

Scope Rules: Example

```
#include <stdio.h>
int square(int a);
int add_y(int x);
int x = 5,
    y = 7;

int square(int a)
{
    int s;
    s = a * a;
    return s;
}

int add_y(int x)
{
    int s;
    s = x + y;
    return s;
}

int main(void)
{
    int z;
    z = square(x);
    z = add_y(z);
    printf("%d\n", z);
    return 0;
}
```

Scope of parameter
a

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

100

Scope Rules: Example

```
#include <stdio.h>
int square(int a);
int add_y(int x);
int x = 5,
    y = 7;
int square(int a)
{ int s;
  s = a * a;
  return s;
}
int add_y(int x)
{ int s;
  s = x + y;
  return s;
}
int main(void)
{ int z;
  z = square(x);
  z = add_y(z);
  printf("%d\n", z);
  return 0;
}
```

Scope of local variable
s

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

101

Scope Rules: Example

```
#include <stdio.h>
int square(int a);
int add_y(int x);
int x = 5,
    y = 7;
int square(int a)
{ int s;
  s = a * a;
  return s;
}
int add_y(int x)
{ int s;
  s = x + y;
  return s;
}
int main(void)
{ int z;
  z = square(x);
  z = add_y(z);
  printf("%d\n", z);
  return 0;
}
```

*Local variables
are independent!*
(unless their scopes are nested)

Scope of local variable
s

Scope of local variable
s

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

102

Scope Rules: Example

```
#include <stdio.h>
int square(int a);
int add_y(int x);
int x = 5,
    y = 7;
int square(int a)
{ int s;
  s = a * a;
  return s;
}
int add_y(int x)
{ int s;
  s = x + y;
  return s;
}
int main(void)
{ int z;
  z = square(x);
  z = add_y(z);
  printf("%d\n", z);
  return 0;
}
```

*Local variables
are independent!*
(unless their scopes are nested)

Scope of local variable
s

Scope of local variable
s

Scope of local variable
z

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

103

Scope Rules: Example

```
#include <stdio.h>
int square(int a);
int add_y(int x);
int x = 5,
    y = 7;
int square(int a)
{ int s;
  s = a * a;
  return s;
}
int add_y(int x)
{ int s;
  s = x + y;
  return s;
}
int main(void)
{ int z;
  z = square(x);
  z = add_y(z);
  printf("%d\n", z);
  return 0;
}
```

Scope of parameter
x

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

104

Scope Rules: Example

```
#include <stdio.h>
int square(int a);
int add_y(int x);
int x = 5,
    y = 7;
int square(int a)
{ int s;
  s = a * a;
  return s;
}
int add_y(int x)
{ int s;
  s = x + y;
  return s;
}
int main(void)
{ int z;
  z = square(x);
  z = add_y(z);
  printf("%d\n", z);
  return 0;
}
```

Shadowing!
In nested scopes,
inner scope takes precedence!

Scope of global variable
x

Scope of parameter
x

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

105

Debugging

- Source-level Debugger **gdb**
 - Basic **gdb** commands
 - **run**
 - starts the execution of the program in the debugger
 - **break *function_name***
 - inserts a breakpoint at *function_name*
 - program execution will stop at the breakpoint
 - **list *line_numbers***
 - lists the current or specified *line_numbers*
 - **print *variable_name***
 - prints the current value of the variable *variable_name*
 - **next**
 - executes the next statement (one statement at a time)
 - **quit**
 - exits the debugger (and terminates the program)
 - **help**
 - provides helpful details on debugger commands

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

106

Debugging

- Source-level Debugger **`gdb`** (continued)
 - Additional **`gdb`** commands
 - **`step`**
 - steps into a function call
 - **`finish`**
 - continues execution until the current function is finished
 - **`where`**
 - shows where in the function call hierarchy you are
 - prints a *back trace* of current *stack frames*
 - **`up`**
 - steps up one stack frame (up into the caller)
 - **`down`**
 - steps down one stack frame (down into the callee)
 - **`info locals`**
 - lists the local variables in the current function (current stack frame)
 - **`info scope function_name`**
 - lists the variables in scope of the *function_name*

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

107

Scope Rules: Example

- Program example: `scope.c` (part 1/2)

```

/* Scope.c: example demonstrating scope rules */
/* author: Rainer Doemer */
/* modifications: */
/* 10/30/04 RD initial version */

#include <stdio.h>

int square(int a); /* global function declarations */
int add_y(int x);

int x = 5, /* global variables */
    y = 7;

int square(int a) /* global function definition */
{
    int s; /* local variable */

    s = a * a;
    return s;
}
...

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

108

Scope Rules: Example

- Program example: `scope.c` (part 2/2)

```

...
int add_y(int x)          /* global function definition */
{
    int s;               /* local variable */

    s = x + y;
    return s;
}

int main(void)           /* main function definition */
{
    int z;               /* local variable */

    z = square(x);
    z = add_y(z);

    printf("%d, %d, %d\n", x, y, z);
    return 0;
}

/* EOF */

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

109

Scope Rules: Example

- Example session: `scope.c` (part 1/3)

```

% vi Scope.c
% gcc Scope.c -o Scope -Wall -ansi -g
% Scope
5, 7, 32
% gdb Scope
GNU gdb 5.0
[...]
(gdb) break main
Breakpoint 1 at 0x1079c: file Scope.c, line 36.
(gdb) run
Starting program: /users/faculty/doemer/eecs10/Scope/Scope

Breakpoint 1, main () at Scope.c:36
36      z = square(x);
(gdb) step
square (a=5) at Scope.c:20
20      s = a * a;
(gdb) next
21      return s;
...

```

EE

Scope Rules: Example

- Example session: `scope.c` (part 2/3)

```

...
(gdb) next
22     }
(gdb) next
main () at Scope.c:37
37     z = add_y(z);
(gdb) step
add_y (x=25) at Scope.c:28
28     s = x + y;
(gdb) where
#0  add_y (x=25) at Scope.c:28
#1  0x107c4 in main () at Scope.c:37
(gdb) up
#1  0x107c4 in main () at Scope.c:37
37     z = add_y(z);
(gdb) down
#0  add_y (x=25) at Scope.c:28
28     s = x + y;
...

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

111

Scope Rules: Example

- Example session: `scope.c` (part 3/3)

```

...
(gdb) finish
Run till exit from #0  add_y (x=25) at Scope.c:28
0x107c4 in main () at Scope.c:37
37     z = add_y(z);
Value returned is $1 = 32
(gdb) info locals
z = 25
(gdb) info scope square
Scope for square:
Symbol a is an argument at stack/frame offset 68, length 4.
Symbol s is a local variable at frame offset -20, length 4.
(gdb) info scope add_y
Scope for add_y:
Symbol x is an argument at stack/frame offset 68, length 4.
Symbol s is a local variable at frame offset -20, length 4.
(gdb) quit
%
```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

112

Data Structures

- Introduction
 - Until now, we have used (mostly) single data elements of basic (non-composite) type
 - integral types
 - floating point types
 - Most programs, however, require complex *data structures* using composite types
 - arrays, lists, queues, stacks
 - trees, graphs
 - dictionaries
 - ANSI C provides built-in support for
 - Arrays
 - Structures, unions, enumerators
 - Pointers

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

113

Arrays

- Array data type in C
 - Composite data type
 - Type is an array of a sub-type (e.g. array of `int`)
 - Fixed number of elements
 - Array size is fixed at time of definition (e.g. 100 elements)
 - Element access by index (aka. subscript)
 - Element-access operator: `array[index]` (e.g. `A[42]`)
- Example:

```
int A[10]; /* array of ten integers */  
  
A[0] = 42; /* access to elements */  
A[1] = 100;  
A[2] = A[0] + 5 * A[1];
```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

114

Arrays

- Array Indexing
 - Start counting from 0
 - First element has index 0
 - Last element has index Size-1
- Example:

```
int A[10];

A[0] = 42;
A[1] = 100;
A[2] = A[0] + 5 * A[1];
A[3] = -1;
A[4] = 44;
A[5] = 55;
/* ... */
A[9] = 99;
```

	A
0	42
1	100
2	542
3	-1
4	44
5	55
6	0
7	0
8	0
9	99

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

115

Arrays

- Array Indexing
 - for loops are often very helpful
 - `for(i=0; i<N; i++)`
`{...A[i]...}`
- Example:

```
int A[10];
int i;

for(i=0; i<10; i++)
{ A[i] = i*10 + i;
}
for(i=0; i<10; i++)
{ printf("%d, ", A[i]);
}
```

	A
0	0
1	11
2	22
3	33
4	44
5	55
6	66
7	77
8	88
9	99

```
0, 11, 22, 33, 44, 55, 66, 77, 88, 99,
```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

116

Arrays

- Array Indexing
 - Array indices are *not* checked by the compiler!
 - Accessing an array with an *index out of range* results in undefined behavior!
- Example:


```
int A[10];
int i;

A[-1] = 42; /* INVALID ACCESS! */

for(i=0; i<=10; i++)
  /* INVALID LOOP RANGE! */
  { printf("%d, ", A[i]);
  }
```

0	0
1	0
2	0
3	0
4	0
5	0
6	0
7	0
8	0
9	0

EECS10: Computational Methods in ECE, Review 9-17 (c) 2006 R. Doemer 117

Arrays

- Array Initialization
 - Static initialization at time of array definition
 - Initial elements listed in { }
- Example:


```
int A[10] = { 42, 100,
              310, 44,
              55, 0,
              3, 4,
              0, 99};
```

	A
0	42
1	100
2	310
3	44
4	55
5	0
6	3
7	4
8	0
9	99

EECS10: Computational Methods in ECE, Review 9-17 (c) 2006 R. Doemer 118

Arrays

- Array Initialization
 - Static initialization at time of array definition
 - Initial elements listed in { }

- Example:

```
int A[ ] = { 42, 100,
            310, 44,
            55, 0,
            3, 4,
            0, 99};
```

- With given initializer list, array size may be omitted
 - automatically determined

	A
0	42
1	100
2	310
3	44
4	55
5	0
6	3
7	4
8	0
9	99

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

119

Arrays

- Array Initialization
 - Static initialization at time of array definition
 - Initial elements listed in { }

- Example:

```
int A[10] = { 1, 2, 3};
```

- With given initializer list *and* array size, unlisted elements are zero-initialized
 - array is filled up with zeros

	A
0	1
1	2
2	3
3	0
4	0
5	0
6	0
7	0
8	0
9	0

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

120

Arrays

- Multi-dimensional Arrays
 - Array of an array...
- Example:

```
int M[3][2] = {{1, 2},
               {3, 4},
               {5, 6}};

int i, j;

for(i=0; i<3; i++)
{ for(j=0; j<2; j++)
  { printf("%d ",
           M[i][j]);
    }
  printf("\n");
}
```

M	0	1
0	1	2
1	3	4
2	5	6

1	2
3	4
5	6

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

121

Arrays

- Operator associativity and precedence
 - parentheses, array access (), [] left to right
 - unary operators +, -, !, ++, -- right to left
 - type casting (*typename*) right to left
 - multiplication, division, modulo *, /, % left to right
 - addition, subtraction +, - left to right
 - shift left, shift right <<, >> left to right
 - relational operators <, <=, >=, > left to right
 - equality ==, != left to right
 - logical and && left to right
 - logical or || left to right
 - conditional operator ?: left to right
 - assignment operators =, +=, *=, etc. right to left
 - comma operator , left to right

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

122

Arrays

- Program example: `Histogram.c`
- Desired output:

```
% Histogram
Please enter data value 1: 11
Please enter data value 2: 22
Please enter data value 3: 3
Please enter data value 4: 33
[...]
1: 11 *****
2: 22 *****
3: 3 ****
4: 33 *****
[...]
```

Arrays

- Program example: `Histogram.c` (part 1/3)

```
/* Histogram.c: print a histogram of data values */
/* author: Rainer Doemer */
/* modifications: */
/* 11/02/04 RD initial version */

#include <stdio.h>

/* constants */
#define NUM_ROWS 10

/* main function */
int main(void)
{
    /* variable definitions */
    int Data[NUM_ROWS];
    int i, j, max;
    double scale;
    ...
}
```

Arrays

- Program example: `Histogram.c` (part 2/3)

```

...
/* input section */
for(i = 0; i < NUM_ROWS; i++)
{ printf("Please enter data value %2d: ", i+1);
  scanf("%d", &Data[i]);
} /* rof */

/* computation section */
max = 0;
for(i = 0; i < NUM_ROWS; i++)
{ if (Data[i] > max)
  { max = Data[i];
    } /* fi */
} /* rof */
scale = 70.0 / max;
...

```

Arrays

- Program example: `Histogram.c` (part 3/3)

```

...
/* output section */
for(i = 0; i < NUM_ROWS; i++)
{ printf("%2d: %5d ", i+1, Data[i]);
  for(j = 0; j < Data[i]*scale; j++)
  { printf("");
    } /* rof */
  printf("\n");
} /* rof */

/* exit */
return 0;
} /* end of main */

/* EOF */

```

Arrays

- Example session: `Histogram.c`

```
% vi Histogram.c
% gcc Histogram.c -o Histogram -Wall -ansi
% Histogram
Please enter data value 1: 11
Please enter data value 2: 22
Please enter data value 3: 3
Please enter data value 4: 33
Please enter data value 5: 44
Please enter data value 6: 55
Please enter data value 7: 66
Please enter data value 8: 33
Please enter data value 9: 22
Please enter data value 10: 22
1: 11 *****
2: 22 *****
3: 3 ****
4: 33 *****
5: 44 *****
6: 55 *****
7: 66 *****
8: 33 *****
9: 22 *****
10: 22 *****
%
```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doerner 127

Passing Arguments to Functions

- Pass by Value
 - only the *current value* is passed as argument
 - the parameter is a *copy* of the argument
 - changes to the parameter *do not* affect the argument
- Pass by Reference
 - a *reference* to the object is passed as argument
 - the parameter is a *reference* to the argument
 - changes to the parameter *do* affect the argument
- In ANSI C, ...
 - ... basic types are passed by value
 - ... arrays are passed by reference

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doerner

128

Passing Arguments to Functions

- Example: Pass by Value

```
void f(int p)
{
    printf("p before modification is %d\n", p);
    p = 42;
    printf("p after modification is %d\n", p);
}

int main(void)
{
    int a = 0;
    printf("a before function call is %d\n", a);
    f(a);
    printf("a after function call is %d\n", a);
}
```

```
a before function call is 0
p before modification is 0
p after modification is 42
a after function call is 0
```

Changes to the parameter *do not* affect the argument!

Passing Arguments to Functions

- Example: Pass by Reference

```
void f(int p[2])
{
    printf("p[1] before modification is %d\n", p[1]);
    p[1] = 42;
    printf("p[1] after modification is %d\n", p[1]);
}

int main(void)
{
    int a[2] = {0, 0};
    printf("a[1] before function call is %d\n", a[1]);
    f(a);
    printf("a[1] after function call is %d\n", a[1]);
}
```

```
a[1] before function call is 0
p[1] before modification is 0
p[1] after modification is 42
a[1] after function call is 42
```

Changes to the parameter *do* affect the argument!

Character Arrays: Strings

- Text is represented by character arrays (aka. *strings*)
 - Strings are null-terminated arrays of characters
 - String output
 - `printf()` conversion: `"%s"`
- Example:

```
char s1[] = {'H','e','l','l','o',0};
printf("s1 is %s.\n", s1);
```

```
s1 is Hello.
```

	s1
0	'H'
1	'e'
2	'l'
3	'l'
4	'o'
5	0

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

131

Character Arrays: Strings

- Text is represented by character arrays (aka. *strings*)
 - Strings are null-terminated arrays of characters
 - String output
 - `printf()` conversion: `"%s"`
- Example:

```
char s1[] = {'H','e','l','l','o',0};
char s2[] = "Hello";
printf("s1 is %s.\n", s1);
printf("s2 is %s.\n", s2);
```

```
s1 is Hello.
s2 is Hello.
```

	s2
0	'H'
1	'e'
2	'l'
3	'l'
4	'o'
5	0

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

132

Character Arrays: Strings

- Text is represented by character arrays (aka. *strings*)
 - Strings are null-terminated arrays of characters
 - String output
 - `printf()` conversion: `"%s"`
- Example:

```
char s1[] = {'H','e','l','l','o',0};
char s2[] = "Hello";

printf("s1 is %s.\n", s1);
printf("s2 is %s.\n", s2);
s1[1] = 'i';
s1[2] = 0;
printf("Modified s1 is %s.\n", s1);
```

```
s1 is Hello.
s2 is Hello.
Modified s1 is Hi.
```

	s2
0	'H'
1	'i'
2	0
3	'l'
4	'o'
5	0

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

133

Character Arrays: Strings

- Text is represented by character arrays (aka. *strings*)
 - Strings are null-terminated arrays of characters
 - String input
 - `scanf()` conversion: `"%Ns"`,
where `N` specifies maximum field width = array size - 1
 - address argument can be `&string[0]`
- Example:

```
char s1[6];

printf("Enter a string: ");
scanf("%5s", &s1[0]);
printf("s1 is %s.\n", s1);
```

```
Enter a string: Test
s1 is Test.
```

	s1
0	'T'
1	'e'
2	's'
3	't'
4	0
5	0

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

134

Character Arrays: Strings

- Text is represented by character arrays (aka. *strings*)
 - Strings are null-terminated arrays of characters
 - String input
 - `scanf()` conversion: `"%Ns"`, where `N` specifies maximum field width = array size - 1
 - address argument can be `&string[0]` or simply `string`
- Example:

```
char s1[6];
printf("Enter a string: ");
scanf("%5s", s1);
printf("s1 is %s.\n", s1);
```

```
Enter a string: Test
s1 is Test.
```

	s1
0	'T'
1	'e'
2	's'
3	't'
4	0
5	0

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

135

Character Arrays: Strings

- Text is represented by character arrays (aka. *strings*)
 - Strings are null-terminated arrays of characters
 - Characters are represented by numeric values
 - ASCII table defines character values 0-127
- Example:

```
char s1[] = "ABC12";
int i = 0;
while(s1[i])
{ printf("%c = %d\n", s1[i], s1[i]);
  i++; }
```

```
A = 65
B = 66
C = 67
1 = 49
2 = 50
```

	s1
0	'A'
1	'B'
2	'C'
3	'1'
4	'2'
5	0

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

136

Character Arrays: Strings

- ASCII Table

- American Standard Code for Information Interchange

0 <i>NUL</i>	1 <i>SOH</i>	2 <i>STX</i>	3 <i>ETX</i>	4 <i>EOT</i>	5 <i>ENQ</i>	6 <i>ACK</i>	7 <i>BEL</i>
8 <i>BS</i>	9 <i>HT</i>	10 <i>NL</i>	11 <i>VT</i>	12 <i>NP</i>	13 <i>CR</i>	14 <i>SO</i>	15 <i>SI</i>
16 <i>DLE</i>	17 <i>DC1</i>	18 <i>DC2</i>	19 <i>DC3</i>	20 <i>DC4</i>	21 <i>NAK</i>	22 <i>SYN</i>	23 <i>ETB</i>
24 <i>CAN</i>	25 <i>EM</i>	26 <i>SUB</i>	27 <i>ESC</i>	28 <i>FS</i>	29 <i>GS</i>	30 <i>RS</i>	31 <i>US</i>
32	33 !	34 "	35 #	36 \$	37 %	38 &	39 '
40 (41)	42 *	43 +	44 ,	45 -	46 .	47 /
48 0	49 1	50 2	51 3	52 4	53 5	54 6	55 7
56 8	57 9	58 :	59 ;	60 <	61 =	62 >	63 ?
64 @	65 A	66 B	67 C	68 D	69 E	70 F	71 G
72 H	73 I	74 J	75 K	76 L	77 M	78 N	79 O
80 P	81 Q	82 R	83 S	84 T	85 U	86 V	87 W
88 X	89 Y	90 Z	91 [92 \	93]	94 ^	95 _
96 `	97 a	98 b	99 c	100 d	101 e	102 f	103 g
104 h	105 i	106 j	107 k	108 l	109 m	110 n	111 o
112 p	113 q	114 r	115 s	116 t	117 u	118 v	119 w
120 x	121 y	122 z	123 {	124	125 }	126 ~	127 <i>DEL</i>

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

137

Character Arrays: Strings

- Case Study: *Bubble Sort*

- Task: Sort an array of strings alphabetically
 - Input: Array of 10 strings entered by the user
 - Output: Array of 10 strings in alphabetical order

- Approach: Divide and Conquer

- Step 1: Let user enter 10 strings
 - Step 2: Sort the array of strings
 - Step 3: Output the strings in order

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

138

Character Arrays: Strings

- Case Study: *Bubble Sort*
 - Task: Sort an array of strings alphabetically
 - Input: Array of 10 strings entered by the user
 - Output: Array of 10 strings in alphabetical order
- Approach: Divide and Conquer
 - Step 1: Let user enter 10 strings
 - Step 2: Sort the array of strings
 - Algorithm
 - in 9 passes, compare adjacent pairs of strings and swap the pair if they are not in alphabetical order
 - String comparison
 - compare character pairs alphabetically: use ASCII table!
 - String swap (exchange two strings in place)
 - swap each character pair in the two strings
 - Step 3: Output the strings in order

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

139

Character Arrays: Strings

- Program example: `BubbleSort.c` (part 1/7)

```

/* BubbleSort.c: sort strings alphabetically */
/* author: Rainer Doemer */
/* modifications: */
/* 11/01/06 RD swap only adjacent elements */
/* 11/06/04 RD initial version */

#include <stdio.h>

/* constant definitions */
#define NUM 10 /* ten strings */
#define LEN 20 /* of length 20 */

/* function declarations */
void EnterText(char Text[NUM][LEN]);
void PrintText(char Text[NUM][LEN]);
int CompareStrings(char s1[LEN], char s2[LEN]);
void SwapStrings(char s1[LEN], char s2[LEN]);
void BubbleSort(char Text[NUM][LEN]);
...

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

140

Character Arrays: Strings

- Program example: `BubbleSort.c` (part 2/7)

```
...  
  
/* function definitions */  
  
/* let the user enter the text array          */  
  
void EnterText(char Text[NUM][LEN])  
{  
    int i;  
  
    for(i = 0; i < NUM; i++)  
        { printf("Enter text string %2d: ", i+1);  
          scanf("%19s", Text[i]);  
          } /* rof */  
} /* end of EnterText */  
  
...
```

Character Arrays: Strings

- Program example: `BubbleSort.c` (part 3/7)

```
...  
  
/* print the text array on the screen          */  
  
void PrintText(char Text[NUM][LEN])  
{  
    int i;  
  
    for(i = 0; i < NUM; i++)  
        { printf("String %2d: %s\n", i+1, Text[i]);  
          } /* rof */  
} /* end of PrintText */  
  
...
```

Character Arrays: Strings

- Program example: `BubbleSort.c` (part 4/7)

```

...
/* alphabetically compare strings s1 and s2: */
/* return -1, if string s1 < string s2      */
/* return  0, if string s1 = string s2      */
/* return  1, if string s1 > string s2      */
/*                                          */

int CompareStrings(char s1[LEN], char s2[LEN])
{
    int i;
    for(i = 0; i < LEN; i++)
    { if (s1[i] > s2[i])
      { return(1); }
      if (s1[i] < s2[i])
      { return(-1); }
      if (s1[i] == 0 || s2[i] == 0)
      { break; }
    } /* rof */
    return 0;
} /* end of CompareStrings */
...

```

Character Arrays: Strings

- Program example: `BubbleSort.c` (part 5/7)

```

...

/* swap/exchange the strings s1 and s2 in place */

void SwapStrings(char s1[LEN], char s2[LEN])
{
    int i;
    char c;

    for(i = 0; i < LEN; i++)
    { c = s1[i];
      s1[i] = s2[i];
      s2[i] = c;
    } /* rof */
} /* end of SwapStrings */

...

```


Character Arrays: Strings

- Program example: `BubbleSort.c` (part 6/7)

```

...
/* sort the text array by comparing every pair */
/* of strings; if the pair of strings is not in */
/* alphabetical order, swap it */

void BubbleSort(char Text[NUM][LEN])
{
    int p, i;

    for(p = 1; p < NUM; p++)
    { for(i = 0; i < NUM-1; i++)
      { if (CompareStrings(Text[i], Text[i+1]) > 0)
        { SwapStrings(Text[i], Text[i+1]);
          } /* fi */
        } /* rof */
      } /* rof */
    } /* end of BubbleSort */

...

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

145

Character Arrays: Strings

- Program example: `BubbleSort.c` (part 7/7)

```

...
/* main function: enter, sort, print the text */
int main(void)
{
    /* local variables */
    char Text[NUM][LEN]; /* NUM strings, length LEN */

    /* input section */
    EnterText(Text);

    /* computation section */
    BubbleSort(Text);

    /* output section */
    PrintText(Text);

    /* exit */
    return 0;
} /* end of main */

/* EOF */

```

EECS10: Computational Methods in ECE, Review 9-17

(c) 2006 R. Doemer

146

Character Arrays: Strings

- Example session: `BubbleSort.c`

```
% vi BubbleSort.c
% gcc BubbleSort.c -o BubbleSort -Wall -ansi
% BubbleSort
Enter text string 1: Charlie
Enter text string 2: William
Enter text string 3: Donald
Enter text string 4: John
Enter text string 5: Jane
Enter text string 6: Jessie
Enter text string 7: Donald
Enter text string 8: Henry
Enter text string 9: George
Enter text string 10: Emily
String 1: Charlie
String 2: Donald
String 3: Donald
String 4: Emily
String 5: George
String 6: Henry
String 7: Jane
String 8: Jessie
String 9: John
String 10: William
%
```

EE