

Chapter 9: Virtual Memory



Chapter 9: Virtual Memory

- Background
- Demand Paging
- Process Creation
- Page Replacement
- Allocation of Frames
- Thrashing
- Demand Segmentation
- Operating System Examples








Background

- **Virtual memory** – separation of user logical memory from physical memory.
 - Only part of the program needs to be in memory for execution.
 - Logical address space can therefore be much larger than physical address space.
 - Allows address spaces to be shared by several processes.
 - Allows for more efficient process creation.
- Virtual memory can be implemented via:
 - Demand paging
 - Demand segmentation



Virtual Memory That is Larger Than Physical Memory

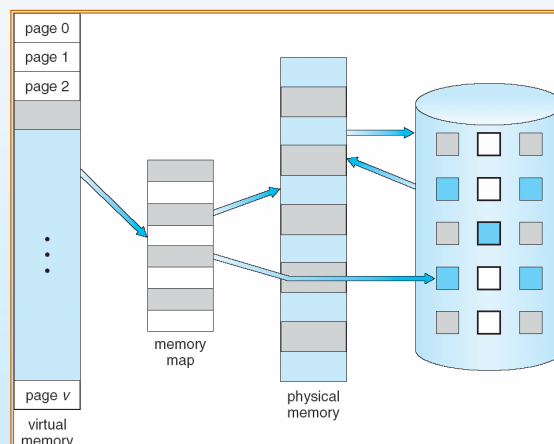

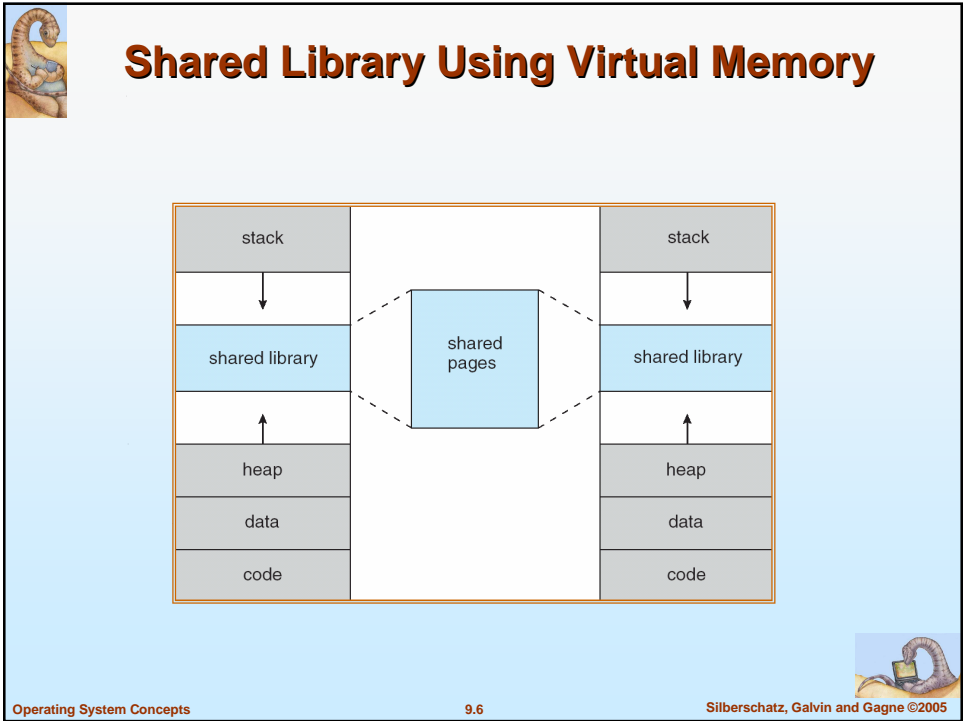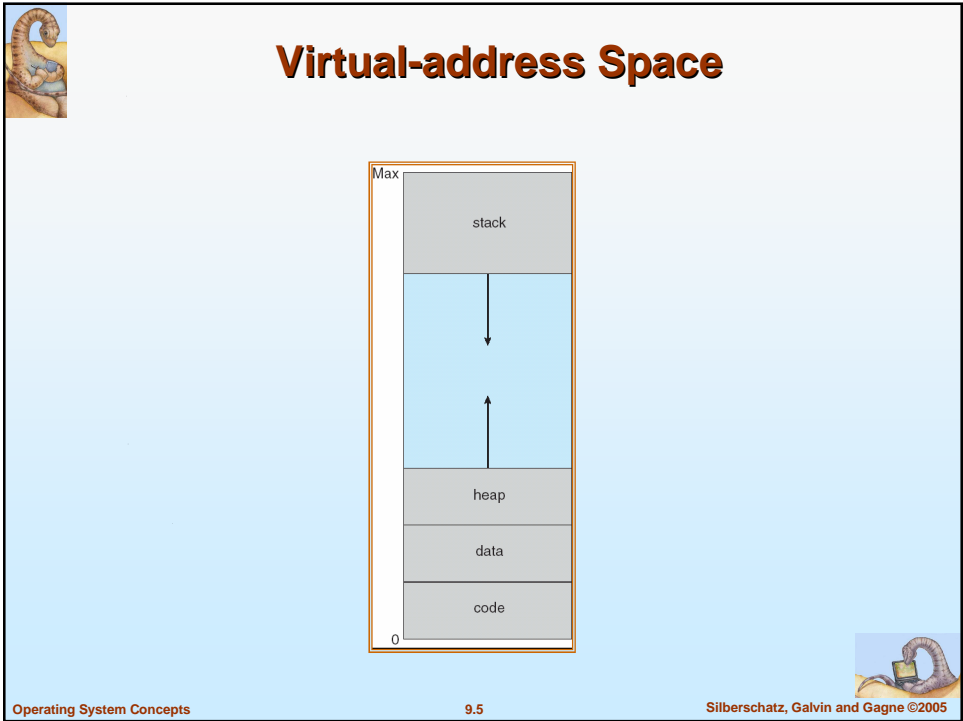




Demand Paging

- Bring a page into memory only when it is needed
 - Less I/O needed
 - Less memory needed
 - Faster response
 - More users
- Page is needed \Rightarrow reference to it
 - invalid reference \Rightarrow abort
 - not-in-memory \Rightarrow bring to memory



Transfer of a Paged Memory to Contiguous Disk Space

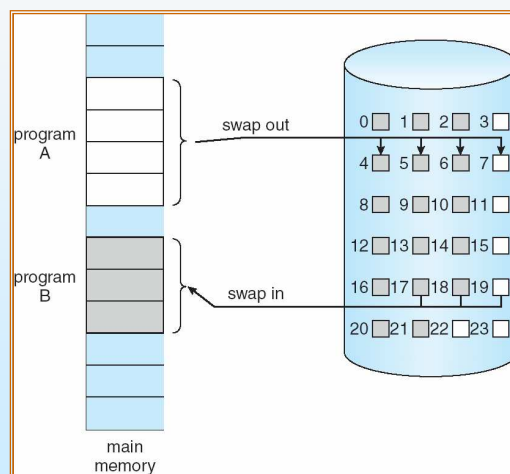



Valid-Invalid Bit

- With each page table entry a valid–invalid bit is associated (1 ⇒ in-memory, 0 ⇒ not-in-memory)
- Initially valid–invalid bit is set to 0 on all entries
- Example of a page table snapshot:


Frame #	valid-invalid bit
	1
	1
	1
	1
	0
⋮	
	0
	0

page table

- During address translation, if valid–invalid bit in page table entry is 0 ⇒ page fault




Page Table When Some Pages Are Not in Main Memory

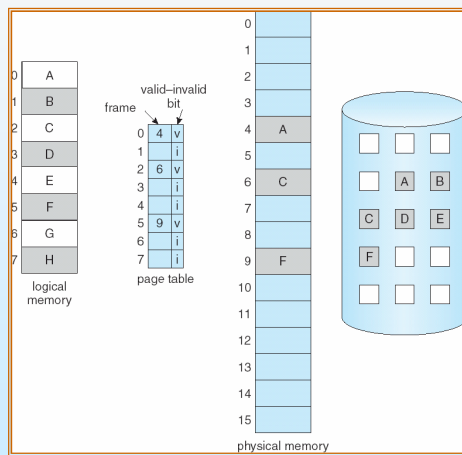



Page Fault


- If there is ever a reference to a page, first reference will trap to OS \Rightarrow page fault
- OS looks at another table to decide:
 - Invalid reference \Rightarrow abort.
 - Just not in memory.
- Get empty frame.
- Swap page into frame.
- Reset tables, validation bit = 1.
- Restart instruction: Least Recently Used
 - block move



- auto increment/decrement location



Steps in Handling a Page Fault

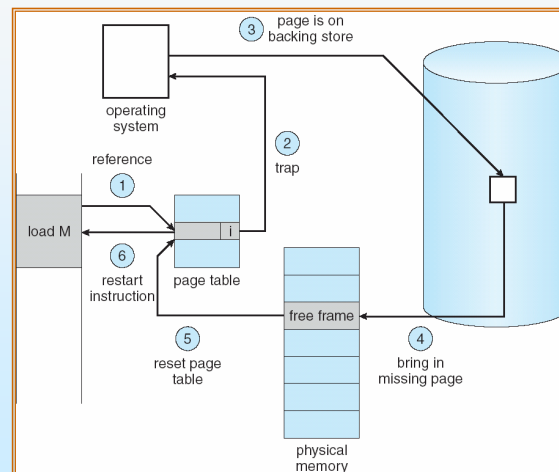



What happens if there is no free frame?

- Page replacement – find some page in memory, but not really in use, swap it out
 - algorithm
 - performance – want an algorithm which will result in minimum number of page faults
- Same page may be brought into memory several times



Process Creation

- Virtual memory allows other benefits during process creation:
 - Copy-on-Write
 - Memory-Mapped Files (later)





Copy-on-Write

- Copy-on-Write (COW) allows both parent and child processes to initially *share* the same pages in memory

If either process modifies a shared page, only then is the page copied

- COW allows more efficient process creation as only modified pages are copied
- Free pages are allocated from a **pool** of zeroed-out pages



Page Replacement

- Prevent over-allocation of memory by modifying page-fault service routine to include page replacement
- Use **modify (dirty) bit** to reduce overhead of page transfers – only modified pages are written to disk
- Page replacement completes separation between logical memory and physical memory – large virtual memory can be provided on a smaller physical memory






Basic Page Replacement

1. Find the location of the desired page on disk
2. Find a free frame:
 - If there is a free frame, use it
 - If there is no free frame, use a page replacement algorithm to select a **victim** frame
3. Read the desired page into the (newly) free frame. Update the page and frame tables.
4. Restart the process



Page Replacement

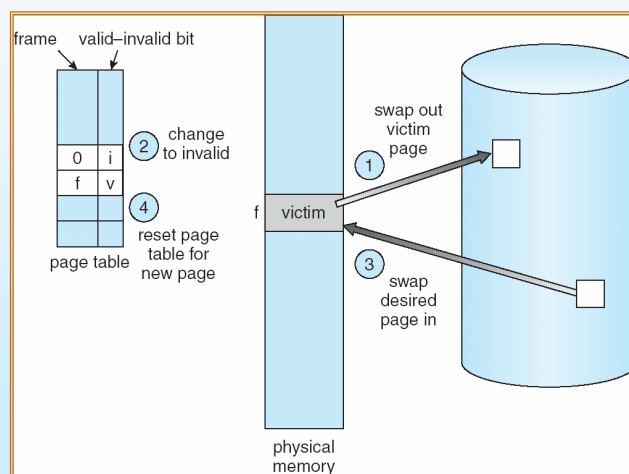




Page Replacement Algorithms

- Want lowest page-fault rate
- Evaluate algorithm by running it on a particular string of memory references (reference string) and computing the number of page faults on that string
- In all our examples, the reference string is
1, 2, 3, 4, 1, 2, 5, 1, 2, 3, 4, 5



Graph of Page Faults Versus The Number of Frames

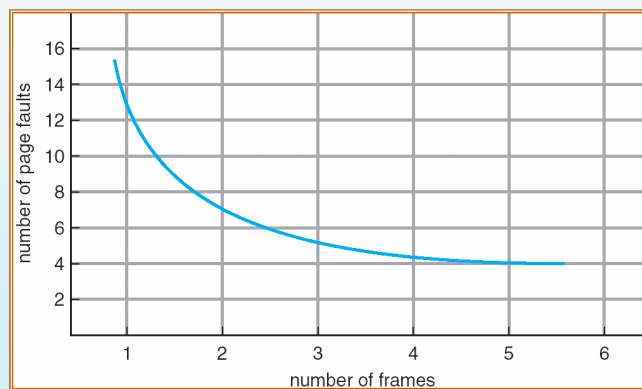



First-In-First-Out (FIFO) Algorithm

- Reference string: 1, 2, 3, 4, 1, 2, 5, 1, 2, 3, 4, 5
- 3 frames (3 pages can be in memory at a time per process)

4 frames

1	1	4	5
2	2	1	3
3	3	2	4

9 page faults


1	1	5	4
2	2	1	5
3	3	2	
4	4	3	

10 page faults

- FIFO Replacement – Belady’s Anomaly
 - more frames ⇒ more page faults



FIFO Illustrating Belady’s Anomaly

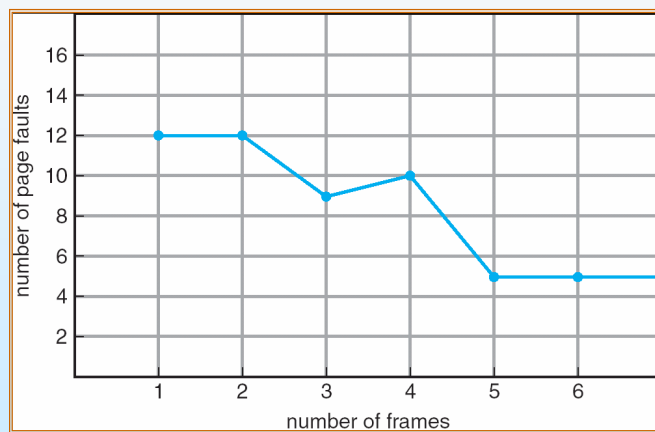



Optimal Algorithm

- Replace page that will not be used for longest period of time
- 4 frames example

1, 2, 3, 4, 1, 2, 5, 1, 2, 3, 4, 5

1	4
2	
3	
4	5

6 page faults

- How do you know this?
- Used for measuring how well your algorithm performs



Least Recently Used (LRU) Algorithm

- Reference string: 1, 2, 3, 4, 1, 2, 5, 1, 2, 3, 4, 5

1	5
2	
3	5 4
4	3

- Counter implementation
 - Every page entry has a counter; every time page is referenced through this entry, copy the clock into the counter
 - When a page needs to be changed, look at the counters to determine which are to change





LRU Algorithm (Cont.)

- Stack implementation – keep a stack of page numbers in a double link form:
 - Page referenced:
 - ▶ move it to the top
 - ▶ requires 6 pointers to be changed
 - No search for replacement




LRU Approximation Algorithms

- Reference bit
 - With each page associate a bit, initially = 0
 - When page is referenced bit set to 1
 - Replace the one which is 0 (if one exists). We do not know the order, however.
- Second chance
 - Need reference bit
 - Clock replacement
 - If page to be replaced (in clock order) has reference bit = 1 then:
 - ▶ set reference bit 0
 - ▶ leave page in memory
 - ▶ replace next page (in clock order), subject to same rules





Second-Chance (clock) Page-Replacement Algorithm

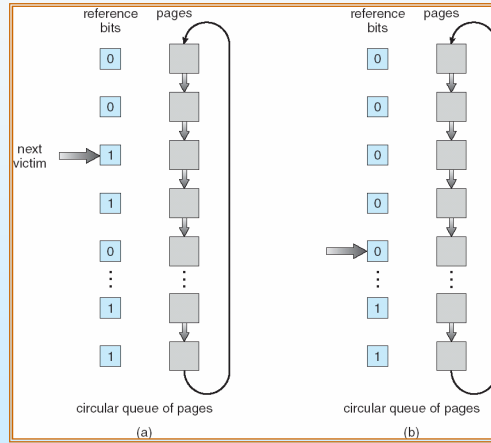

Counting Algorithms

- Keep a counter of the number of references that have been made to each page
- **LFU Algorithm:** replaces page with smallest count
- **MFU Algorithm:** based on the argument that the page with the smallest count was probably just brought in and has yet to be used

